


AD 2.EHTW-ADC

AD ELEV 115 ft AMSL

VAR 0° 2005
ANNUAL RATE
OF CHANGE 6° E

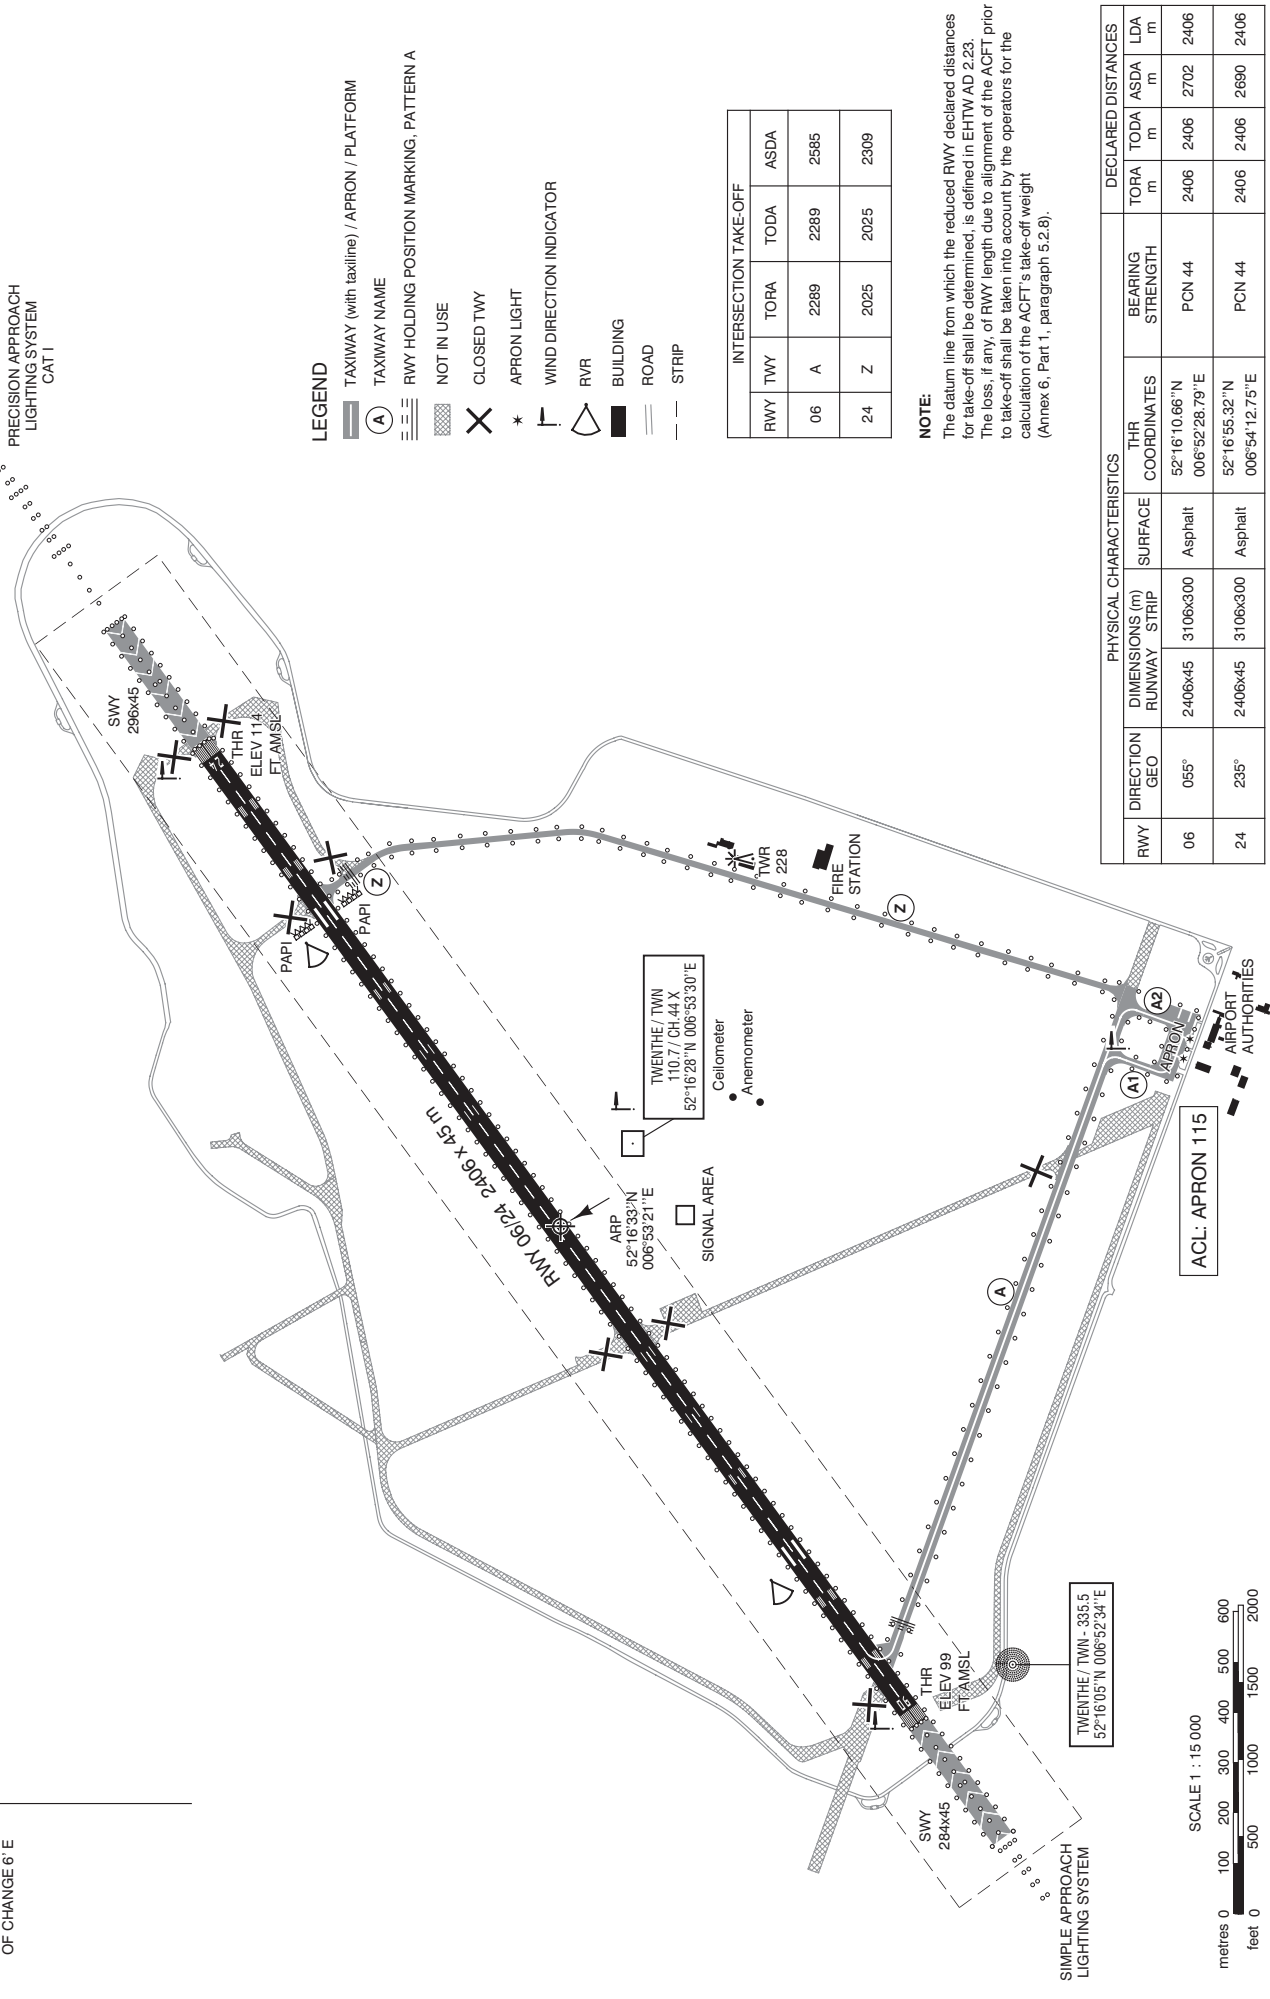

- LEGEND**
- TAXIWAY (with taxiway) / APRON / PLATFORM
 - TAXIWAY NAME
 - RWY HOLDING POSITION MARKING, PATTERN A
 - NOT IN USE
 - CLOSED TWY
 - APRON LIGHT
 - WIND DIRECTION INDICATOR
 - RVR
 - BUILDING
 - ROAD
 - STRIP

INTERSECTION TAKE-OFF		ASDA	
RWY	TWY	TORA	TODA
06	A	2289	2585
24	Z	2025	2309

NOTE:
The datum line from which the reduced RWY declared distances for take-off shall be determined, is defined in EHTW AD 2.23. The loss, if any, of RWY length due to alignment of the ACFT prior to take-off shall be taken into account by the operators for the calculation of the ACFT's take-off weight (Annex 6, Part 1, paragraph 5.2.8).

RWY	DIRECTION GEO	DIMENSIONS (m)		SURFACE	THR COORDINATES	BEARING STRENGTH	DECLARED DISTANCES			
		RUNWAY	STRIP				TORA	TODA	ASDA	LDA
06	055°	2406x45	3106x300	Asphalt	52°16'10.66"N 006°52'28.79"E	PCN 44	2406	2406	2702	2406
24	235°	2406x45	3106x300	Asphalt	52°16'55.32"N 006°54'12.75"E	PCN 44	2406	2406	2690	2406


ACL: APRON 115

TWENTHE / TWN - 335.5
ELEV 99 FT AMSL
52°16'05"N 006°52'34"E

TWENTHE / TWN - 110.7 / CH 44 X
ELEV 114 FT AMSL
52°16'28"N 006°53'30"E

APP
52°16'33"N
006°53'21"E

SCALE 1 : 15 000



CHANGE: New chart.