


GND 121.850  
ATIS 120.925  
TWR 119.300  
CRK APP 119.900

TISMO 1G, VAPAL 1G, GOTEK 1G, ELTIG 1G,  
ERTER 1G, ORTOM 1G, SOVIX 1G, KURUM 1G.

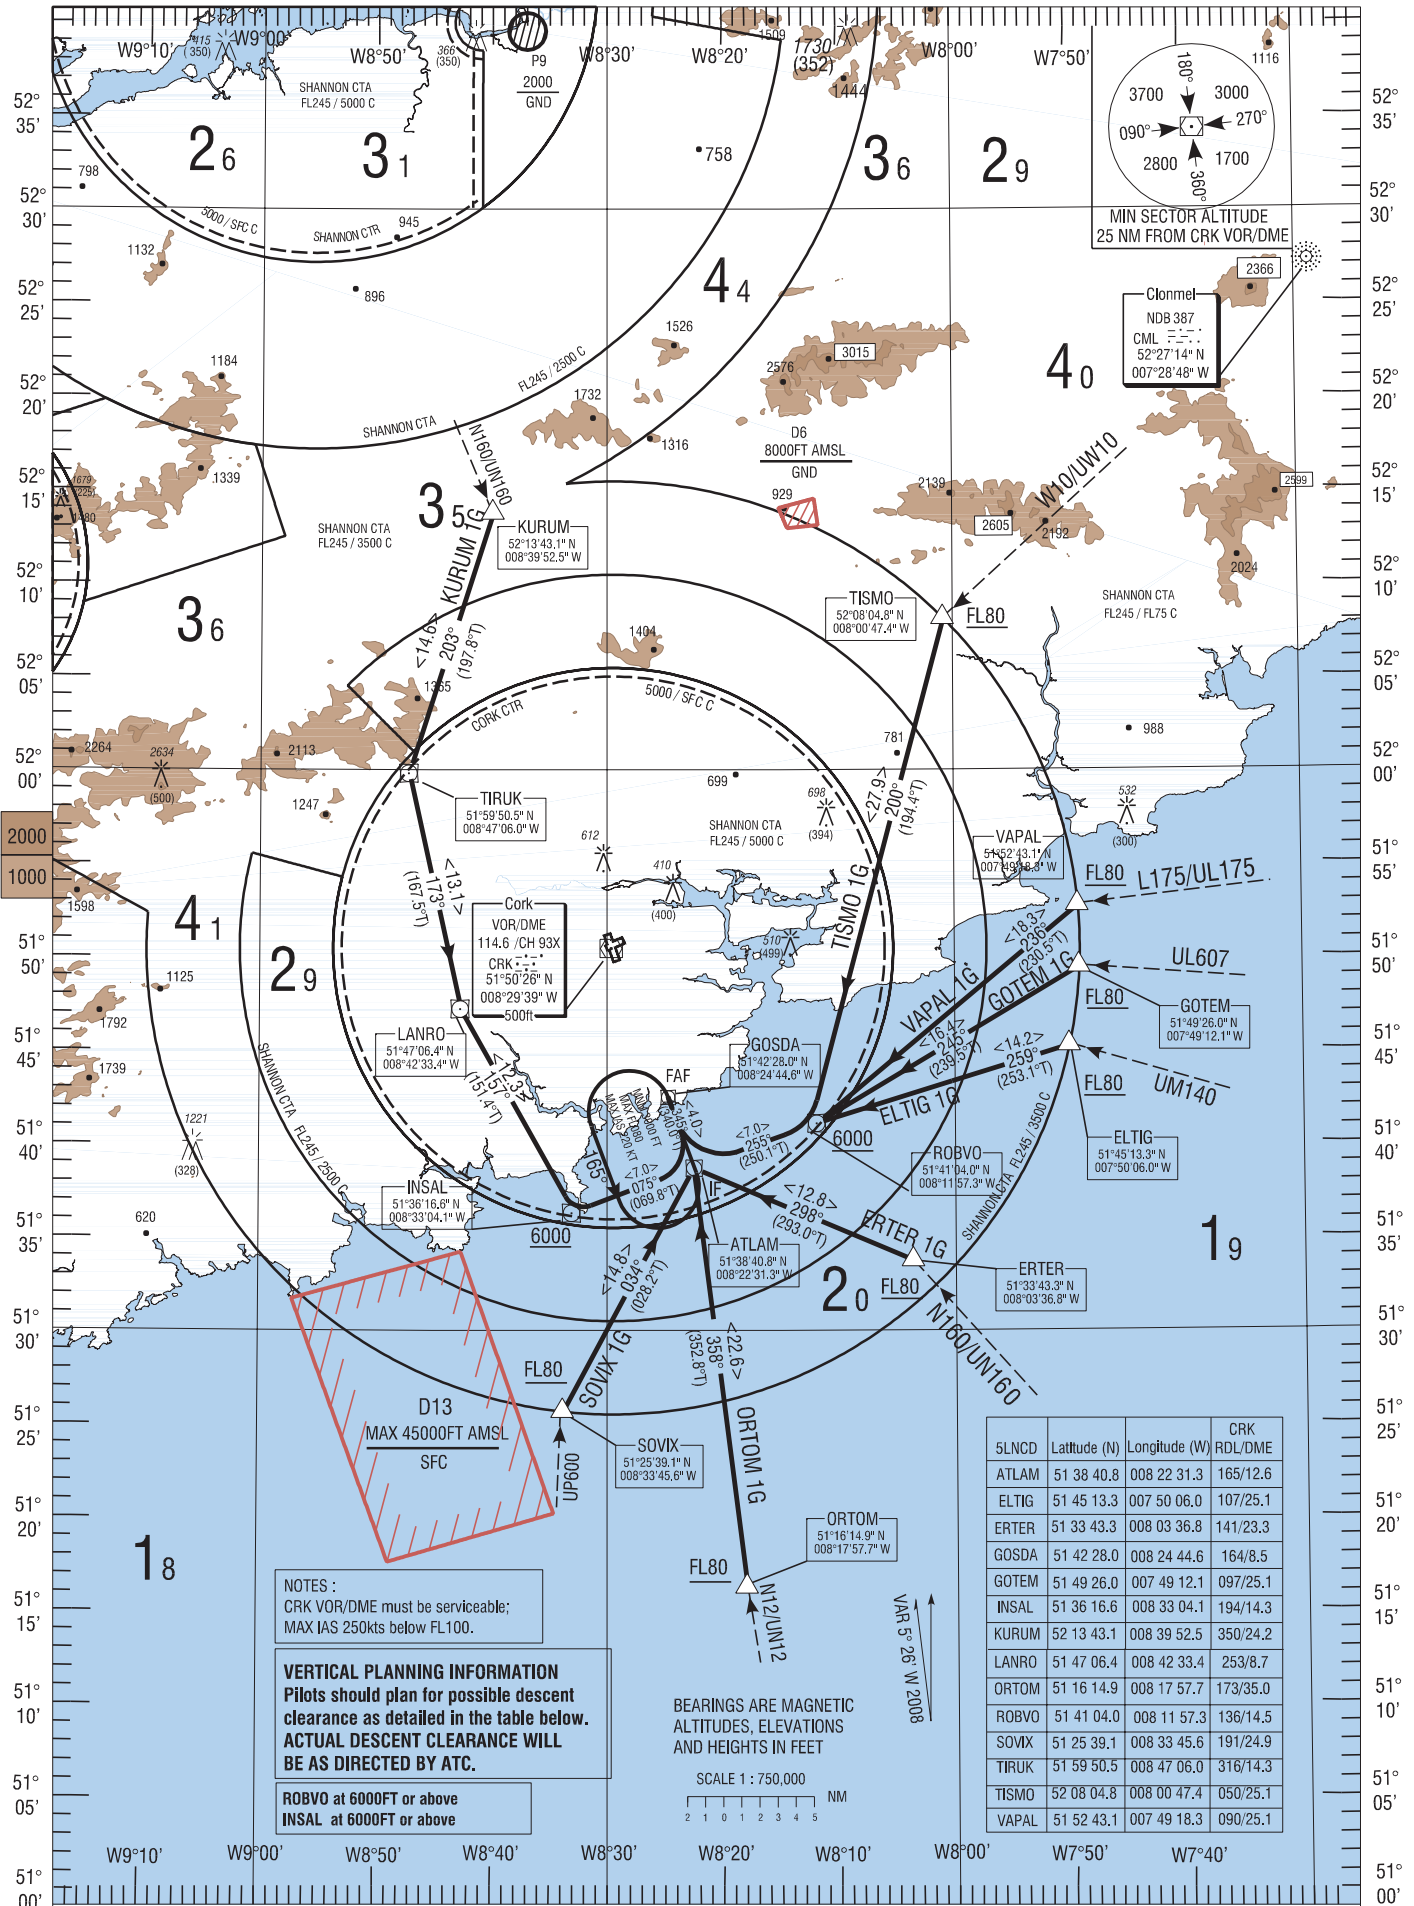

NOTES :  
CRK VOR/DME must be serviceable;  
MAX IAS 250kts below FL100.

**VERTICAL PLANNING INFORMATION**  
Pilots should plan for possible descent  
clearance as detailed in the table below.  
**ACTUAL DESCENT CLEARANCE WILL  
BE AS DIRECTED BY ATC.**

ROBVO at 6000FT or above  
INSAL at 6000FT or above

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN FEET

SCALE 1 : 750,000  
NM  
2 1 0 1 2 3 4 5

5LNCD	Latitude (N)	Longitude (W)	CRK RDL/DME
ATLAM	51 38 40.8	008 22 31.3	165/12.6
ELTIG	51 45 13.3	007 50 06.0	107/25.1
ERTER	51 33 43.3	008 03 36.8	141/23.3
GOSDA	51 42 28.0	008 24 44.6	164/8.5
GOTEK	51 49 26.0	007 49 12.1	097/25.1
INSAL	51 36 16.6	008 33 04.1	194/14.3
KURUM	52 13 43.1	008 39 52.5	350/24.2
LANRO	51 47 06.4	008 42 33.4	253/8.7
ORTOM	51 16 14.9	008 17 57.7	173/35.0
ROBVO	51 41 04.0	008 11 57.3	136/14.5
SOVIX	51 25 39.1	008 33 45.6	191/24.9
TIRUK	51 59 50.5	008 47 06.0	316/14.3
TISMO	52 08 04.8	008 00 47.4	050/25.1
VAPAL	51 52 43.1	007 49 18.3	090/25.1

CHANGE: New Chart

CORK STANDARD ARRIVALS (INSTRUMENT)  
RUNWAY 35

## ELTIG1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	ELTIG	-	-	-	+FL080	-	5.4	P-RNAV
TF	ROBVO	-	259 (253.1)	-	+6000	-	5.4	P-RNAV
TF	ATLAM	-	255 (250.1)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## ERTER1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	ERTER	-	-	-	+FL080	-	5.4	P-RNAV
TF	ATLAM	-	298 (293.0)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## GOTEM1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	GOTEM	-	-	-	+FL080	-	5.4	P-RNAV
TF	ROBVO	-	245 (239.5)	-	+6000	-	5.4	P-RNAV
TF	ATLAM	-	255 (250.1)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## KURUM1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	KURUM	-	-	-	-	-	5.4	P-RNAV
TF	TIRUK	-	203 (197.8)	-	-	-	5.4	P-RNAV
TF	LANRO	-	173 (167.5)	-	-	-	5.4	P-RNAV
TF	INSAL	-	157 (151.4)	-	+6000	-	5.4	P-RNAV
TF	ATLAM	-	075 (069.8)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## ORTOM1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	ORTOM	-	-	-	+FL080	-	5.4	P-RNAV
TF	ATLAM	-	358 (352.8)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## SOVIX1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	SOVIX	-	-	-	+FL080	-	5.4	P-RNAV
TF	ATLAM	-	034 (028.2)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## TISMO1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	TISMO	-	-	-	+FL080	-	5.4	P-RNAV
TF	ROBVO	-	200 (194.4)	-	+6000	-	5.4	P-RNAV
TF	ATLAM	-	255 (250.1)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV

## VAPAL1G STAR RWY35

Path Descriptor	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Magnetic variation	Navigation performance
IF	VAPAL	-	-	-	+FL080	-	5.4	P-RNAV
TF	ROBVO	-	236 (230.5)	-	+6000	-	5.4	P-RNAV
TF	ATLAM	-	255 (250.1)	-	-	220	5.4	P-RNAV
TF or CF	GOSDA	-	345 (340.0)	-	3000	-	5.4	P-RNAV