


AD 2-ESDF-5-2


RONNEBY TOWER 119.200
RONNEBY CONTROL 128.450

THR ELEV 188 ft, AD ELEV 191 ft
HGT are related to THR.
Circling HGT are related to AD ELEV.
BRG are MAG.
ALT, HGT and ELEV in ft.

INSTRUMENT
APPROACH CHART-ICAO




PAR RWY 19
RONNEBY
SWEDEN

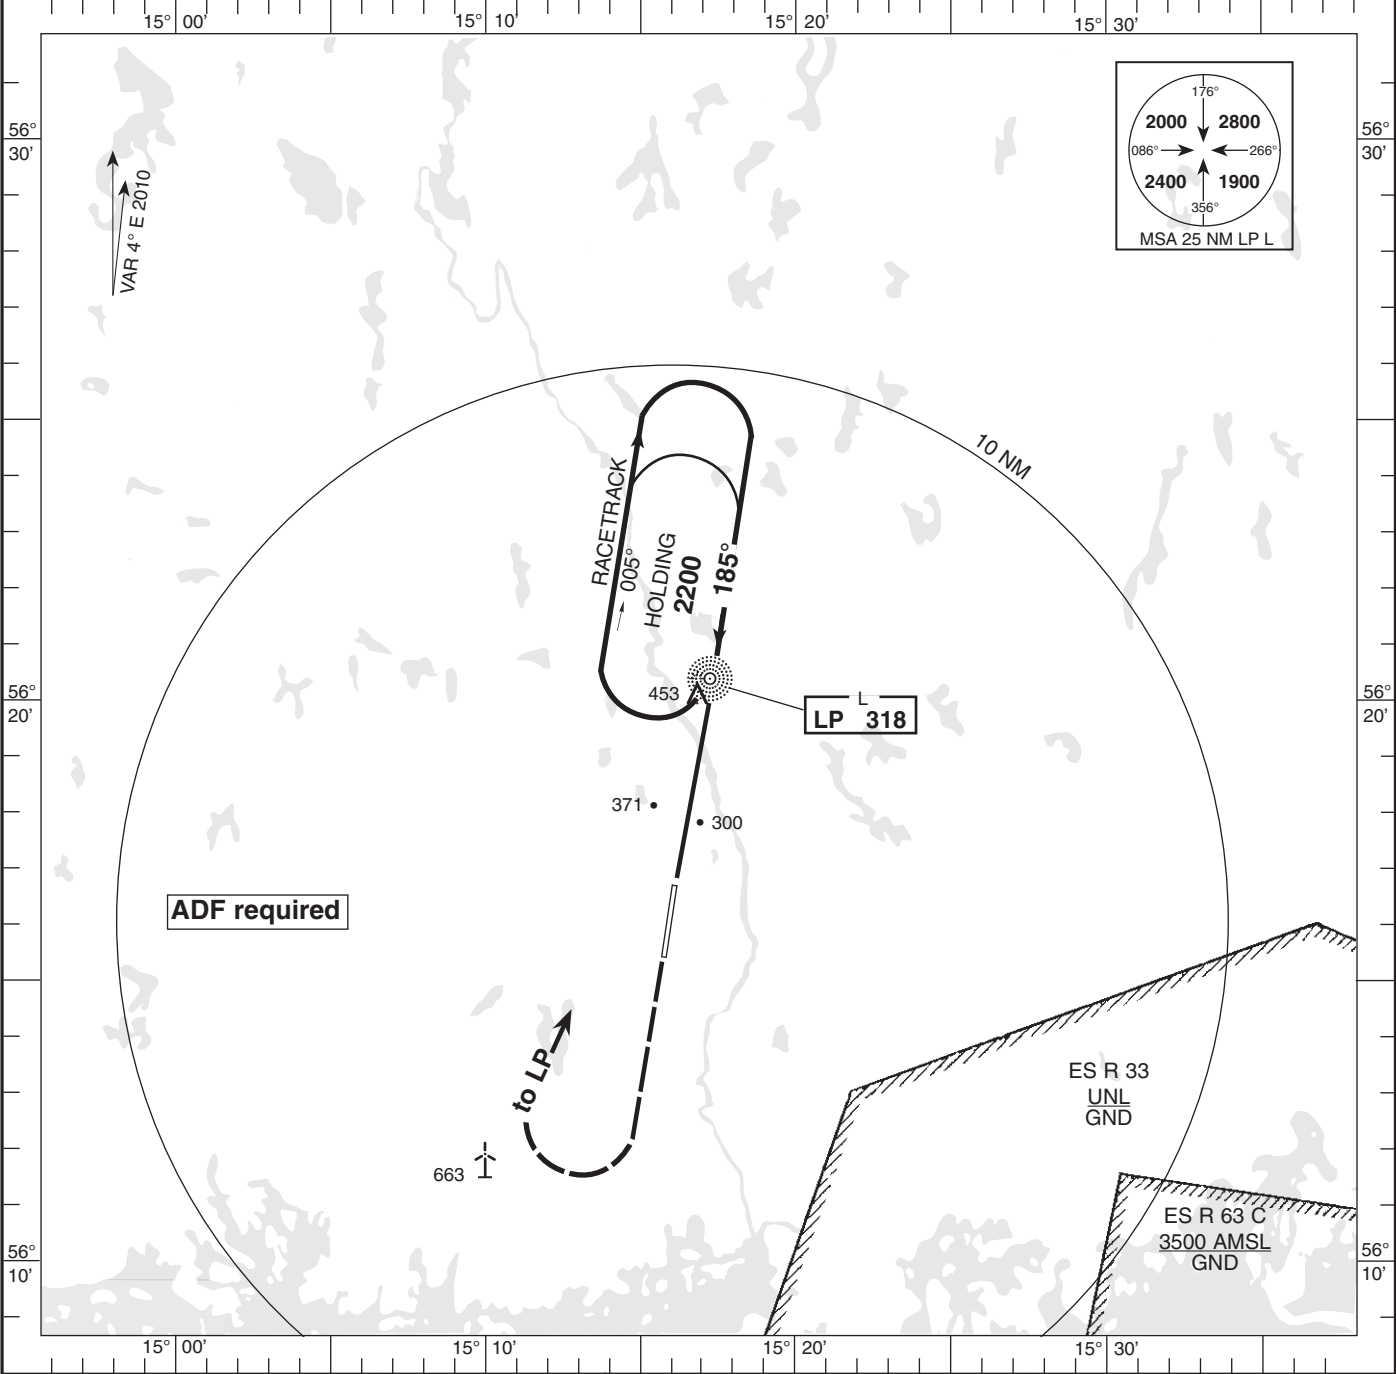

TRANSITION ALTITUDE 5000 AMSL PAPI GP 3.0° (5.2%) THRESHOLD CROSSING HEIGHT 50 FT

CLIMB STRAIGHT AHEAD
TO 1500,
TURN RIGHT TO LP
CLIMBING TO 2200.

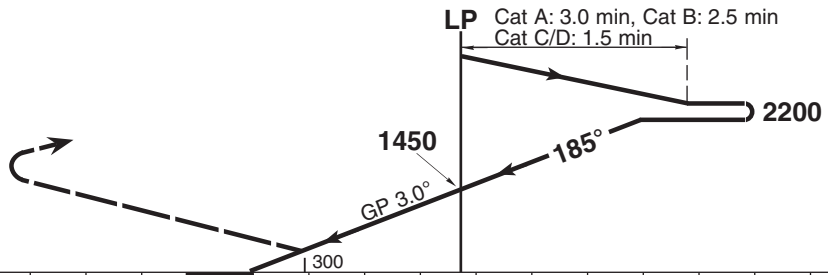

OCA (H)					Final approach							
Cat of ACFT	A	B	C	D	DME RON NM	7	6	5	4	3	2	
Straight-in	430 (242)	442 (254)	450 (262)	461 (273)	ALT (HGT)	2020(1840)	1700(1520)	1390(1210)	1070(890)	750(570)	430(250)	
Circling	670 (480)	670 (480)	850 (660)	1060 (870)	Speed	kt	80	100	120	140	160	180
					Rate of descent	ft/min	425	535	640	745	850	960

ESDF-PAR RWY 19
04 APR 2013

AIRAC AMDT/2013

CHANGE: Procedure revised, OBST, MSA sector SE

LFV