


INSTRUMENT
APPROACH CHART-ICAO




THR ELEV 181 ft, AD ELEV 191 ft
HGT are related to THR.
Circling HGT are related to AD ELEV.
BRG are MAG.
ALT, HGT and ELEV in ft.


RONNEBY TOWER 119.200
RONNEBY CONTROL 128.450

AD 2-ESDF-5-5

PAR RWY 01
RONNEBY
SWEDEN

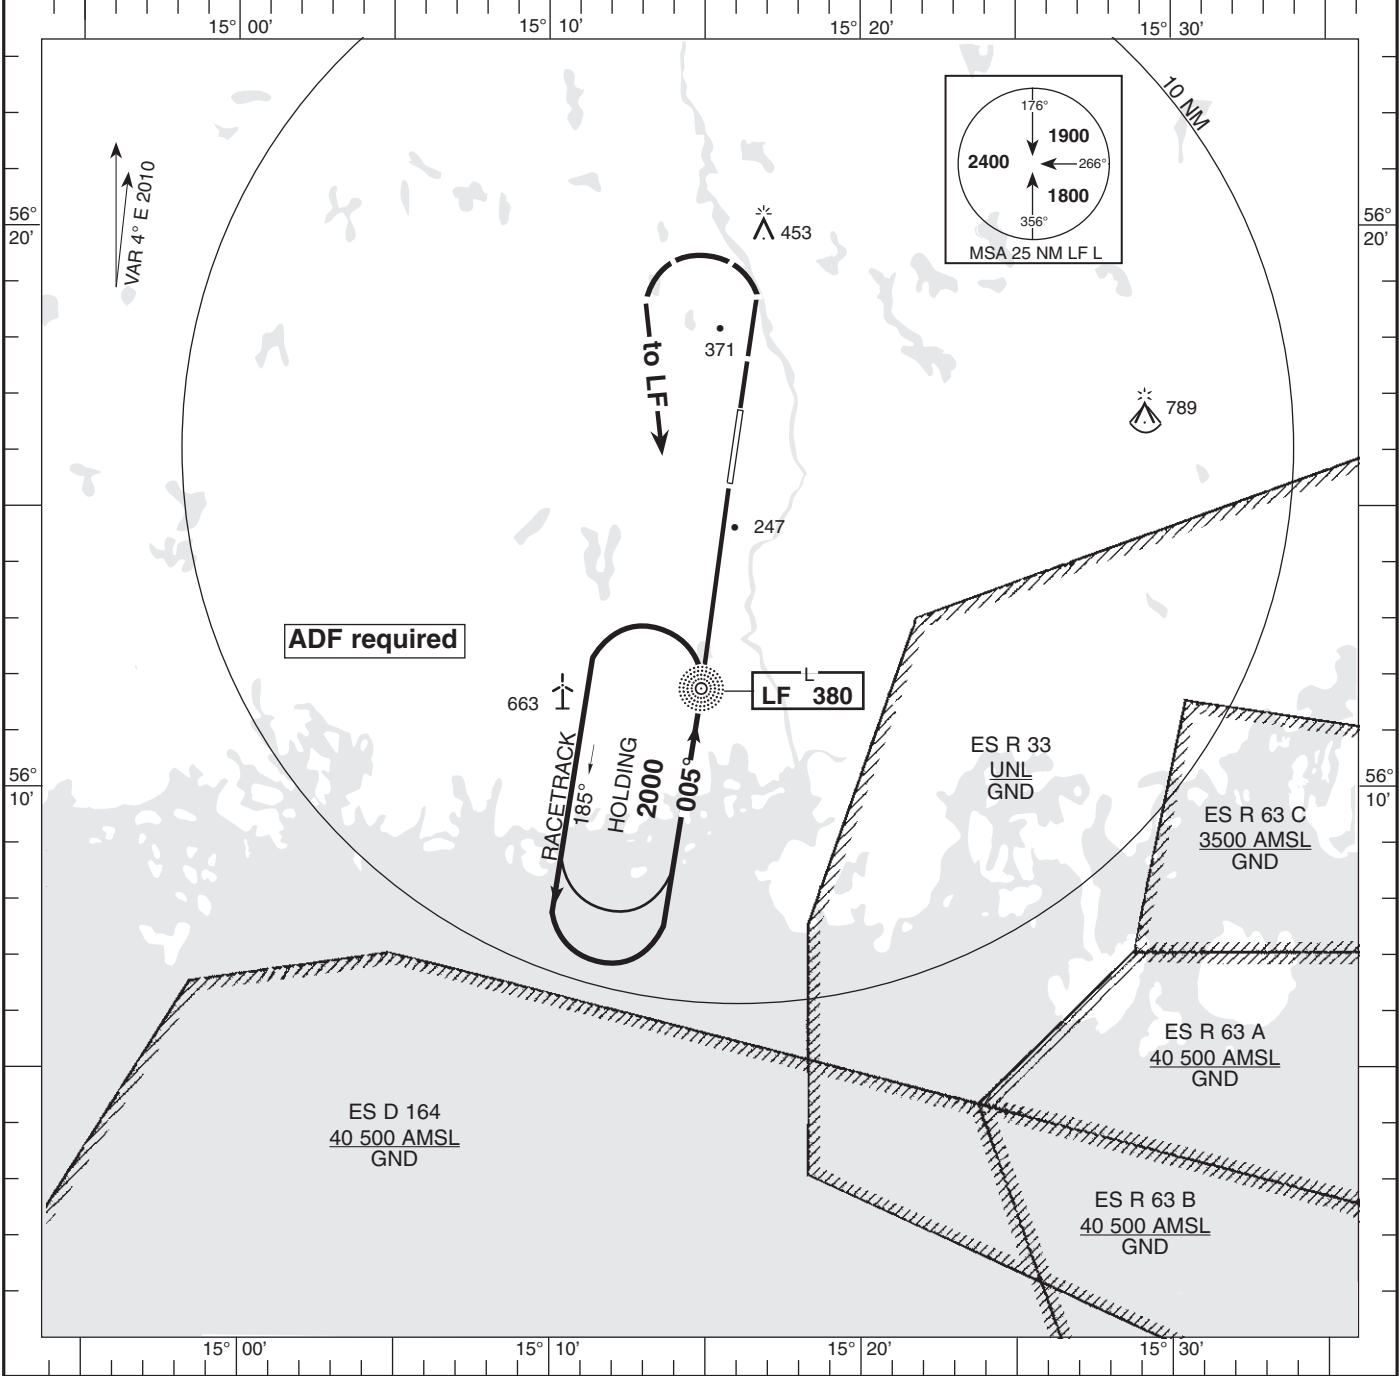

TRANSITION ALTITUDE 5000 AMSL PAPI GP 3.25° (5.7%) THRESHOLD CROSSING HEIGHT 50 FT

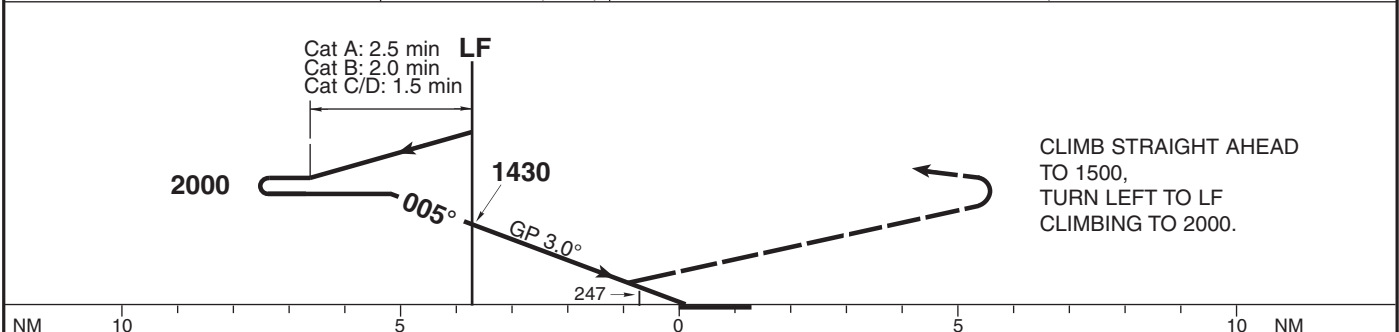

Cat of ACFT	OCA (H)				Final approach							
	A	B	C	D	DME RON NM	5	4	3	2	1		
Straight-in	377 (196)	389 (208)	397 (216)	408 (227)	ALT (HGT)	1880(1700)	1560(1380)	1240(1060)	920(740)	610(430)		
Circling	670 (480)	670 (480)	850 (660)	1060 (870)	Speed	kt	80	100	120	140	160	180
					Rate of decent	ft/min	425	535	640	745	850	960

LFV

CHANGE: Procedure revised, OBST

ESDF-PAR RWY 01
AIRAC AMDT 2/2013 04 APR 2013