

AERODROME CHART - ICAO

37°00'52"N
007°57'57"W

ELEV 7 m

TWR 120.750
GND/SMC 118.575

FARO


RWY	DIRECTION	THR	STRENGTH
10	104°	37°01'02"N 007°59'08"W	PCN 80/F/A/W/T
28	284°	37°00'48"N 007°57'33"W	

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

VAR 04° N 2006
annual change - 09

TAXIWAY	WIDTH	SURFACE	STRENGTH
A,B,C1,C2	23 m	ASPHALT	PCN 90/F/A/W/T
D	26 m		PCN 79/F/A/W/T
E	23 m		PCN 65/F/A/W/T
F,P	23 m		PCN 90/F/A/W/T
RD	25 m		PCN 65/F/A/W/T
RG	25 m		PCN 79/F/A/W/T

APRON	SURFACE	STRENGTH
N NW SW	CONCRETE	PCN 85/R/B/W/T
S		PCN 59/R/B/W/T
NE SE		PCN 72/R/B/W/T
M		PCN 46/R/B/W/T

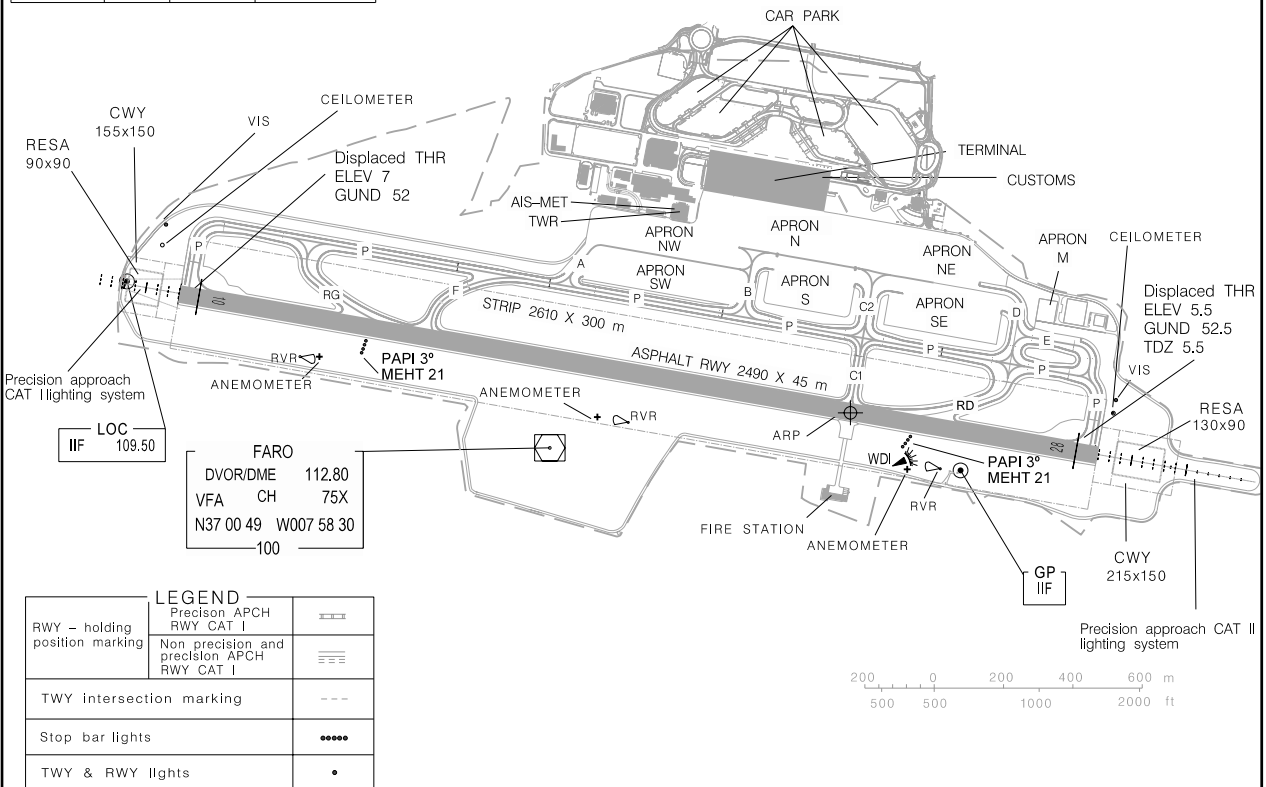


LEGEND		
RWY - holding position marking	Precision APCH RWY CAT I	
	Non precision and precision APCH RWY CAT I	
TWY intersection marking		
Stop bar lights		
TWY & RWY lights		

MARKING AIDS RWY 10/28 AND EXIT TWY



LIGHTING AIDS RWY 10/28 AND EXIT TWY

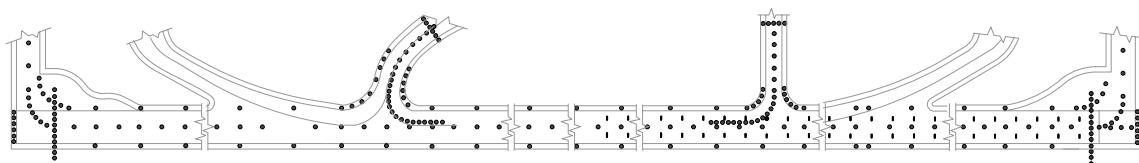

0 100 200 300 400 m
0 500 1000 ft

Chart updated