
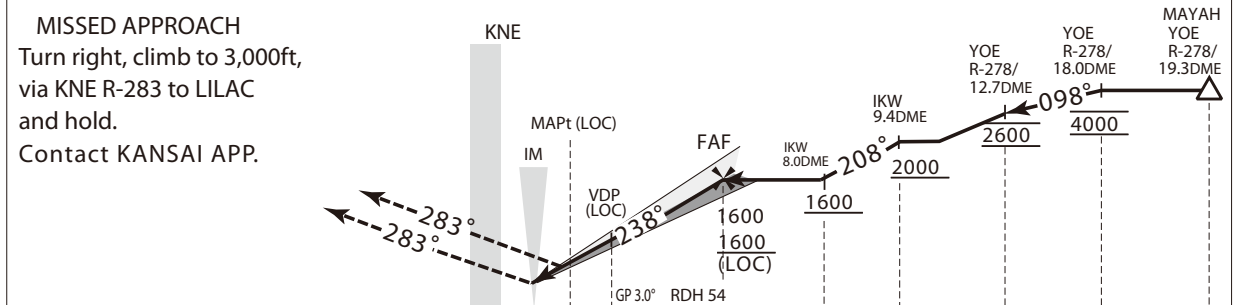


INSTRUMENT APPROACH CHART

RJBB / KANSAI INTL

ILS or LOC RWY 24R CAT II

KANSAI APP 120.25 - 125.5 258.3	ILS - LOC 108.5 IKW ILS-GP 329.9 ILS-DME CH-22X	KANSAI TOWER 118.2 - 118.05 126.2 - 236.8	RADAR AVBL ATIS 127.85
---------------------------------------	--	---	---------------------------

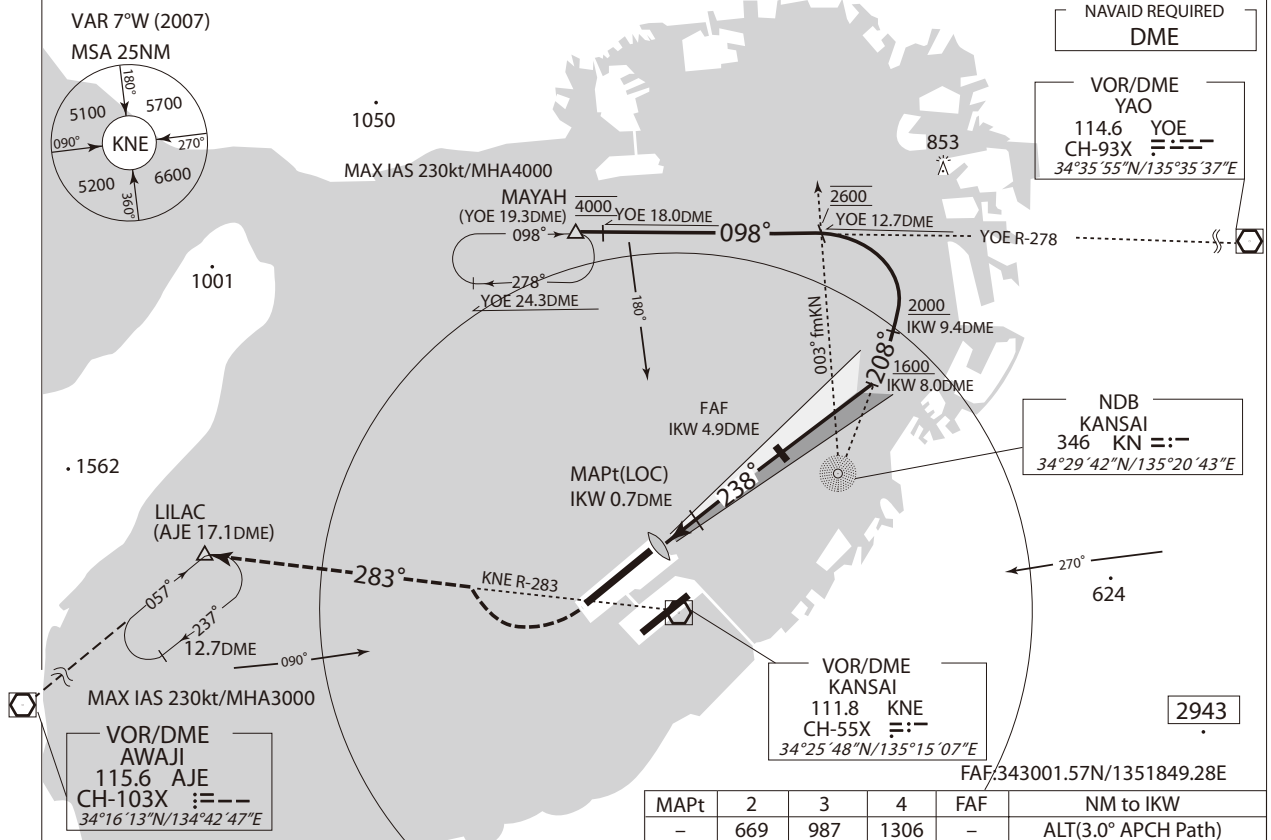

DME to IKW	0.3	0.7	0.9	4.9	8.0			
NM to RWY24R	0	0.1	0.5	0.7	4.7	7.8		

MINIMA		THR elev. 37			AD elev. 17				
CAT	CAT II			CAT I		LOC		CIRCLING	
	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	137 (100)	100	350	237 (200)	550	290 (273)	800	610 (593)	1600
B									2400
C									2400
D/DL							1200		3200

Circling to North side of RWY only.
DH150 (DA187)-RA187 for the operators on operational evaluation phases prior to CAT II operations.