

STANDARD DEPARTURE CHART-INSTRUMENT

ZBAA BEIJING/Capital
RNAV
RWY36L/36R/01(SOSDI)

VAR6°W

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS
AND HEIGHTS IN METERS DME DISTANCES IN
NAUTICAL MILES DISTANCES IN KM


ATIS(DEP) 128.65

APP01 119.0(125.05) (HO)
APP02 126.10(129.0) (HO)
APP03 120.6(125.05) (H24)
APP04 119.7(129.0) (HO)
APP05 127.75(126.5) (HO)
APP06 121.10(126.5) (HO)
APP07 124.40(124.70)
APP08 125.50(124.70)

TL 3600
TA 3000
3300(QNH≥1031HPA)
2700(QNH≤979HPA)

1. RADAR REQUIRED
2. RNAV 1
3. GNSS,DME/DME/IRU REQUIRED

TWR01 124.3(118.3) 18R/36L
TWR02 118.5(118.3) 18L/36R
TWR03 118.05(118.6) 01/19

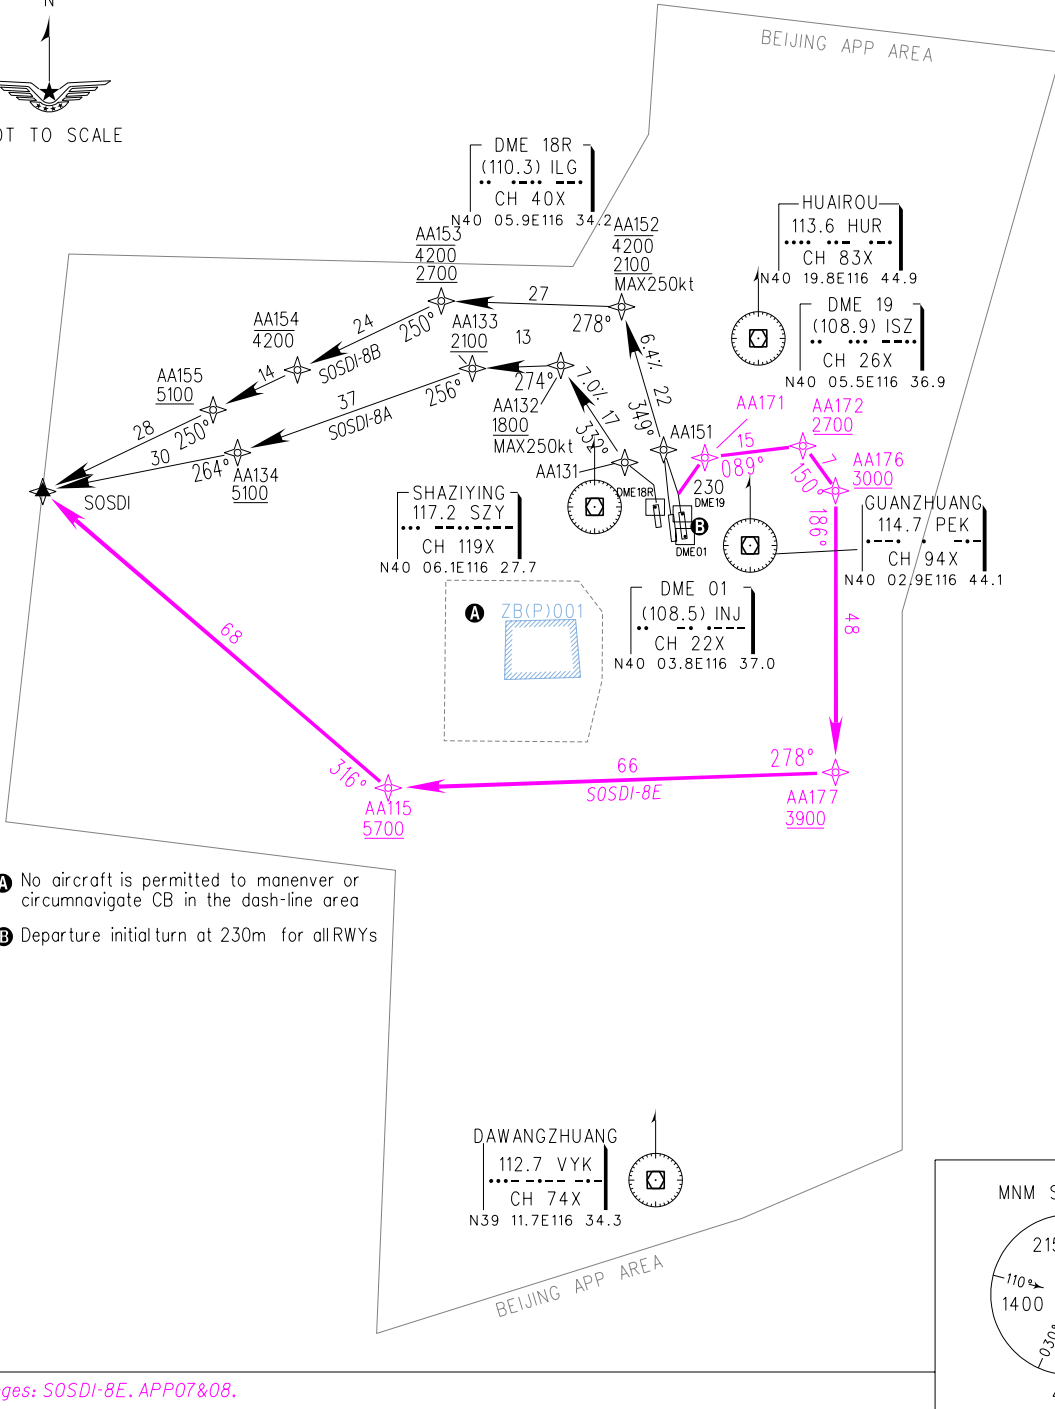

- A No aircraft is permitted to manouver or circumnavigate CB in the dash-line area
- B Departure initial turn at 230m for allRWYs

Changes: SOSDI-8E, APP07&08.