STANDARD ARRIVAL CHART-INSTRUMENT

VAR2° W

ZGGG
GUANGZHOU/Baiyun
RNAV RWY 20R

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS AND HEIGHTS IN METERS DME DISTANCES IN NAUTICAL MILES DISTANCES IN KM	ATIS 127.0 D-ATIS 131.45	APP 126.55(127.75)/AP01 119.70(127.75)/AP02 126.35(119.60)/AP03 121.05(124.20)/AP04 120.40(124.20)/AP05	TL 3600(QNH<980HPA) 3300(QNH≥980HPA) TA 2700
1. RADAR REQUIRED 2. RNAV 1 3. GNSS,DME/DME/IRU REQUIRED	TWR 118.1(E)/118.8(W) (124.3)		

All coordinates used in the procedure are operational equivalent to WGS-84 coordinates.

Note:
1.Holding MAX IAS 380kmH.
2.While simultaneous parallel approaches implemented, GYA-1X, IDU-1X shall be permitted by ATC.
3.under radar control service, actual flight ALT instructed by ATC.

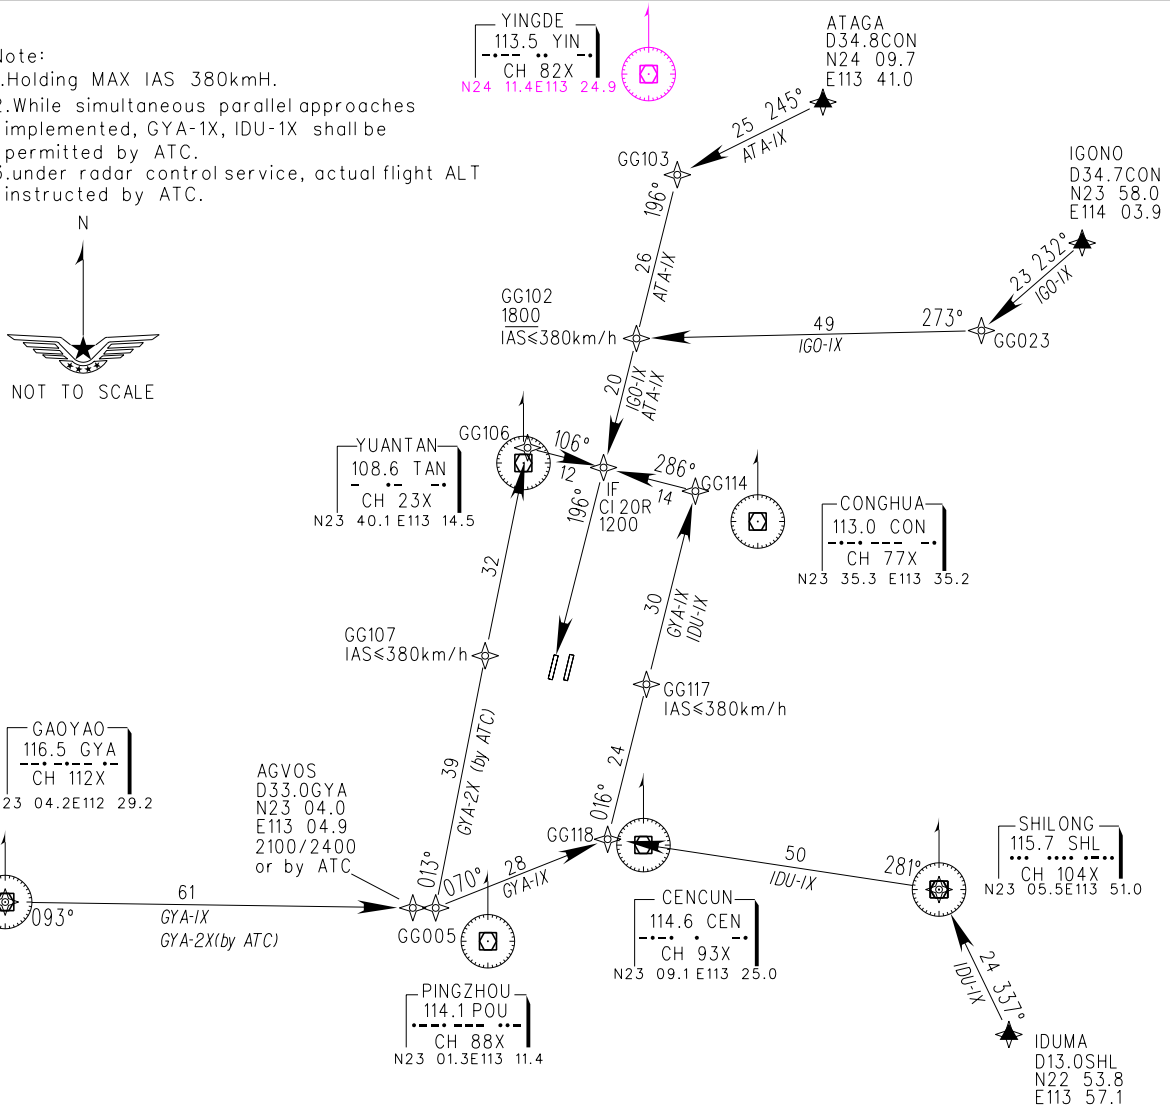

MNM SECT ALT

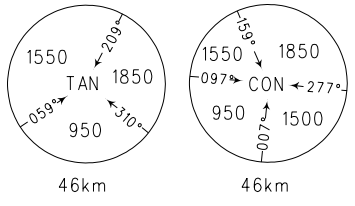

Changes: YIN displaced, APP FREQ, notes.