


ATIS 126.6  
 TWR 124.35(118.1)  
 GND 121.65  
 121.8 for delivery

**ZHHH WUHAN/Tianhe**  
 N30°47.1'E114°12.4' ELEV 34m


**AERODROME CHART**

RWY	Direction	Bearing strength(PCN)
04	044°	TWY C, C1-C4: 90/R/B/W/T
		TWY D2, D4, stands Nr.515-523 80/R/B/W/T
22	224°	RWY, APRON, TWY B, B4, C6: 74/R/B/W/T
		TWY C5(BTN TWY C&B): 71/R/B/W/T
		TWY C5(BTN TWY C&apron): 55/R/B/W/T
		TWY B1, B3, D1: 52/R/B/W/T
		TWY B2 45/R/B/W/T

BEARINGS ARE MAGNETIC  
 ALTITUDES, DISTANCES,  
 ELEVATIONS AND HEIGHTS  
 IN METERS

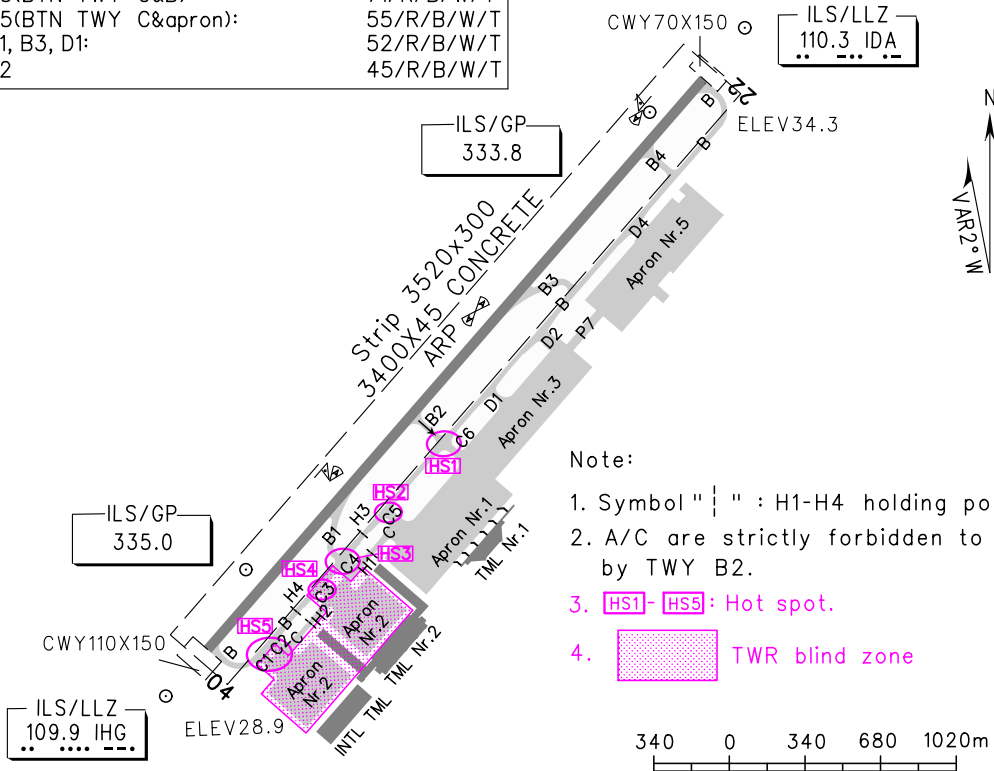

- Note:
1. Symbol "||" : H1-H4 holding positions.
  2. A/C are strictly forbidden to enter RWY by TWY B2.
  3. HS1- HS5: Hot spot.
  4. [Pink shaded area] TWR blind zone

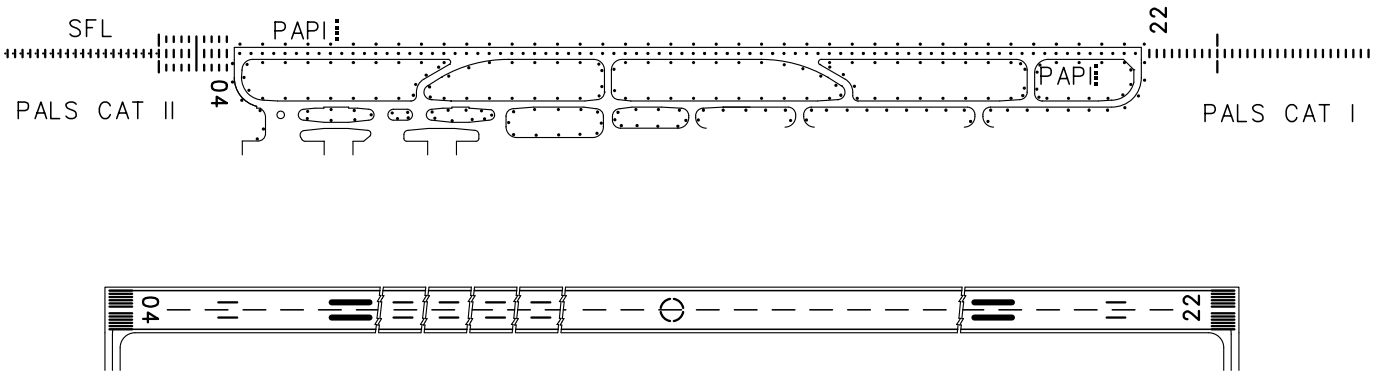

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS		
	RWY04		RWY22		RWY04	RWY22
	REDL	NIL(Day only)	REDL	NIL(Day only)		
A					PALS CAT II	PALS CAT I
B	RVR 400	RVR 500	RVR 400	RVR 500	REDL	REDL
C	VIS 800	VIS 800	VIS 800	VIS 800	RCLL	RCLL
D					PAPI	PAPI
					SFL	
					TDZL	

Changes: Add hot spot, add TWR blind zone.