



ATIS 127.45(Arr) 128.65(DeP)
 D-ATIS 131.45
 TWR(N) 124.3(118.15) TWR(S) 130.45(118.15)
 GND(N) 121.8(124.3) GND(S) 121.65(130.45)
 121.6 for delivery
 DCL 131.45

ZLXY XI'AN/Xianyang

N34° 26.7'E 108° 45.0' ELEV 479m

AERODROME CHART

BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

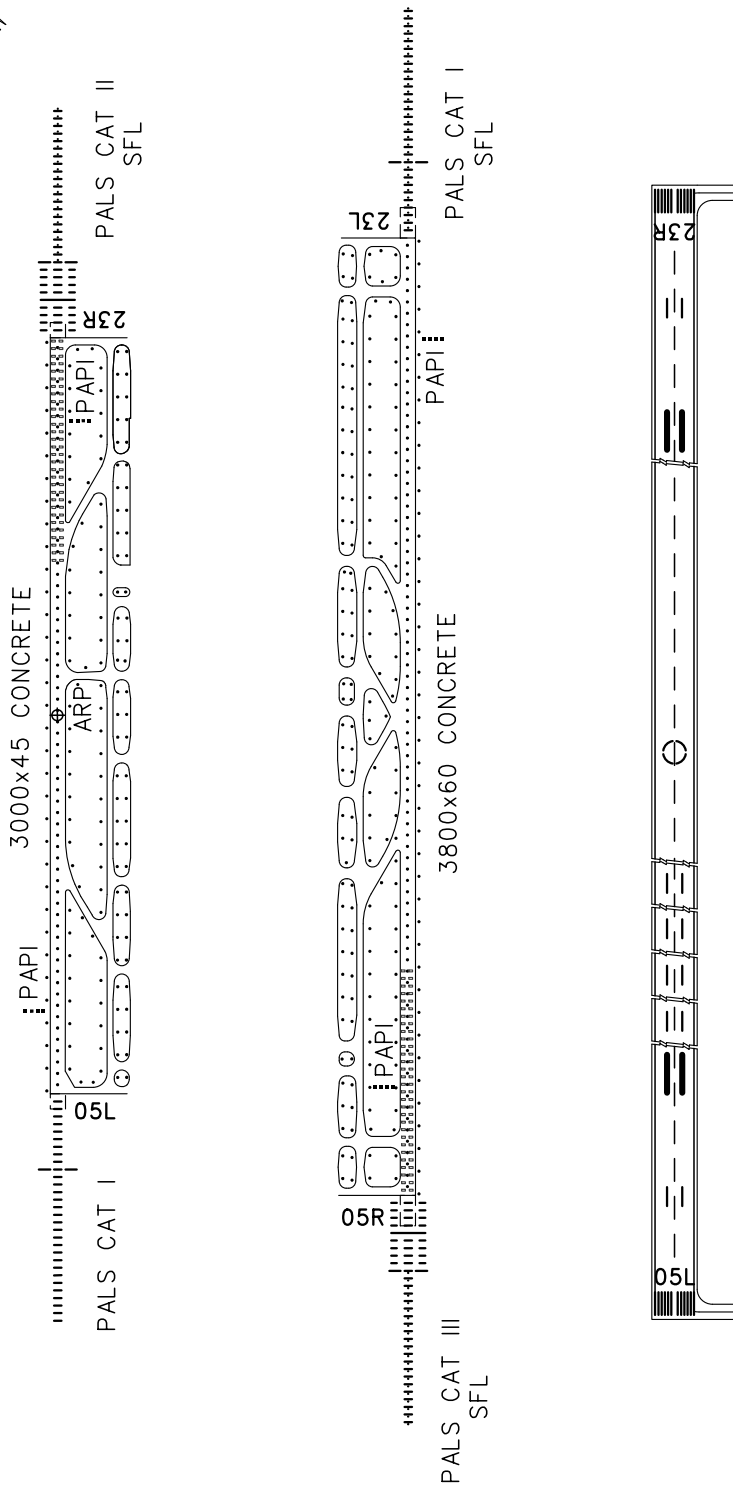

Note: RWY 05R/23L marking is similar to RWY 05L/23R.

ACFT Type		TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS			
		RWY 23R	RWY 05L/23R, 05R/23L	REDL	NIL(Day only)	RWY05L	RWY23R	RWY05R	RWY23L
2 TURB ENG or 3&4 ENG	CAT A.B.C	Low visibility procedure in force REDL,RCLL REDL,RCLM	RVR200	RVR250	RVR400	RVR500	RWY CAT I PALS CAT I PAPI REDL RCLL	RWY CAT II PALS CAT II PAPI REDL RCLL TDZL SFL	RWY CAT III PALS CAT III PAPI REDL RCLL TDZL SFL
	CAT D	RVR250	RVR300	RVR400	RVR500	RWY CAT I PALS CAT I PAPI REDL RCLL	RWY CAT II PALS CAT II PAPI REDL RCLL TDZL SFL	RWY CAT III PALS CAT III PAPI REDL RCLL TDZL SFL	
Other					VIS1600				

Changes: Nil.