

# STANDARD ARRIVAL CHART-INSTRUMENT



VAR3° W

ATIS 127.45  
 D-ATIS 131.45  
 AP01/04 125.1(126.55)  
 AP02 119.05(123.85)  
 AP03 119.6(126.55)  
 TWR(N) 124.3(118.15)  
 TWR(S) 130.45(118.15)

ZLXY XI'AN/Xianyang  
 RNAV Rwy23R


TL 3600 TA 3000 3300(QNH≥1031HPA) 2700(QNH≤979HPA)	1. RADAR REQUIRED 2. RNAV 1 3. GNSS,DME/DME/IRU REQUIRED
---	--

BEARINGS ARE MAGNETIC  
 ALTITUDES, ELEVATIONS  
 AND HEIGHTS IN METERS  
 DME DISTANCES IN  
 NAUTICAL MILES  
 DISTANCES IN KM

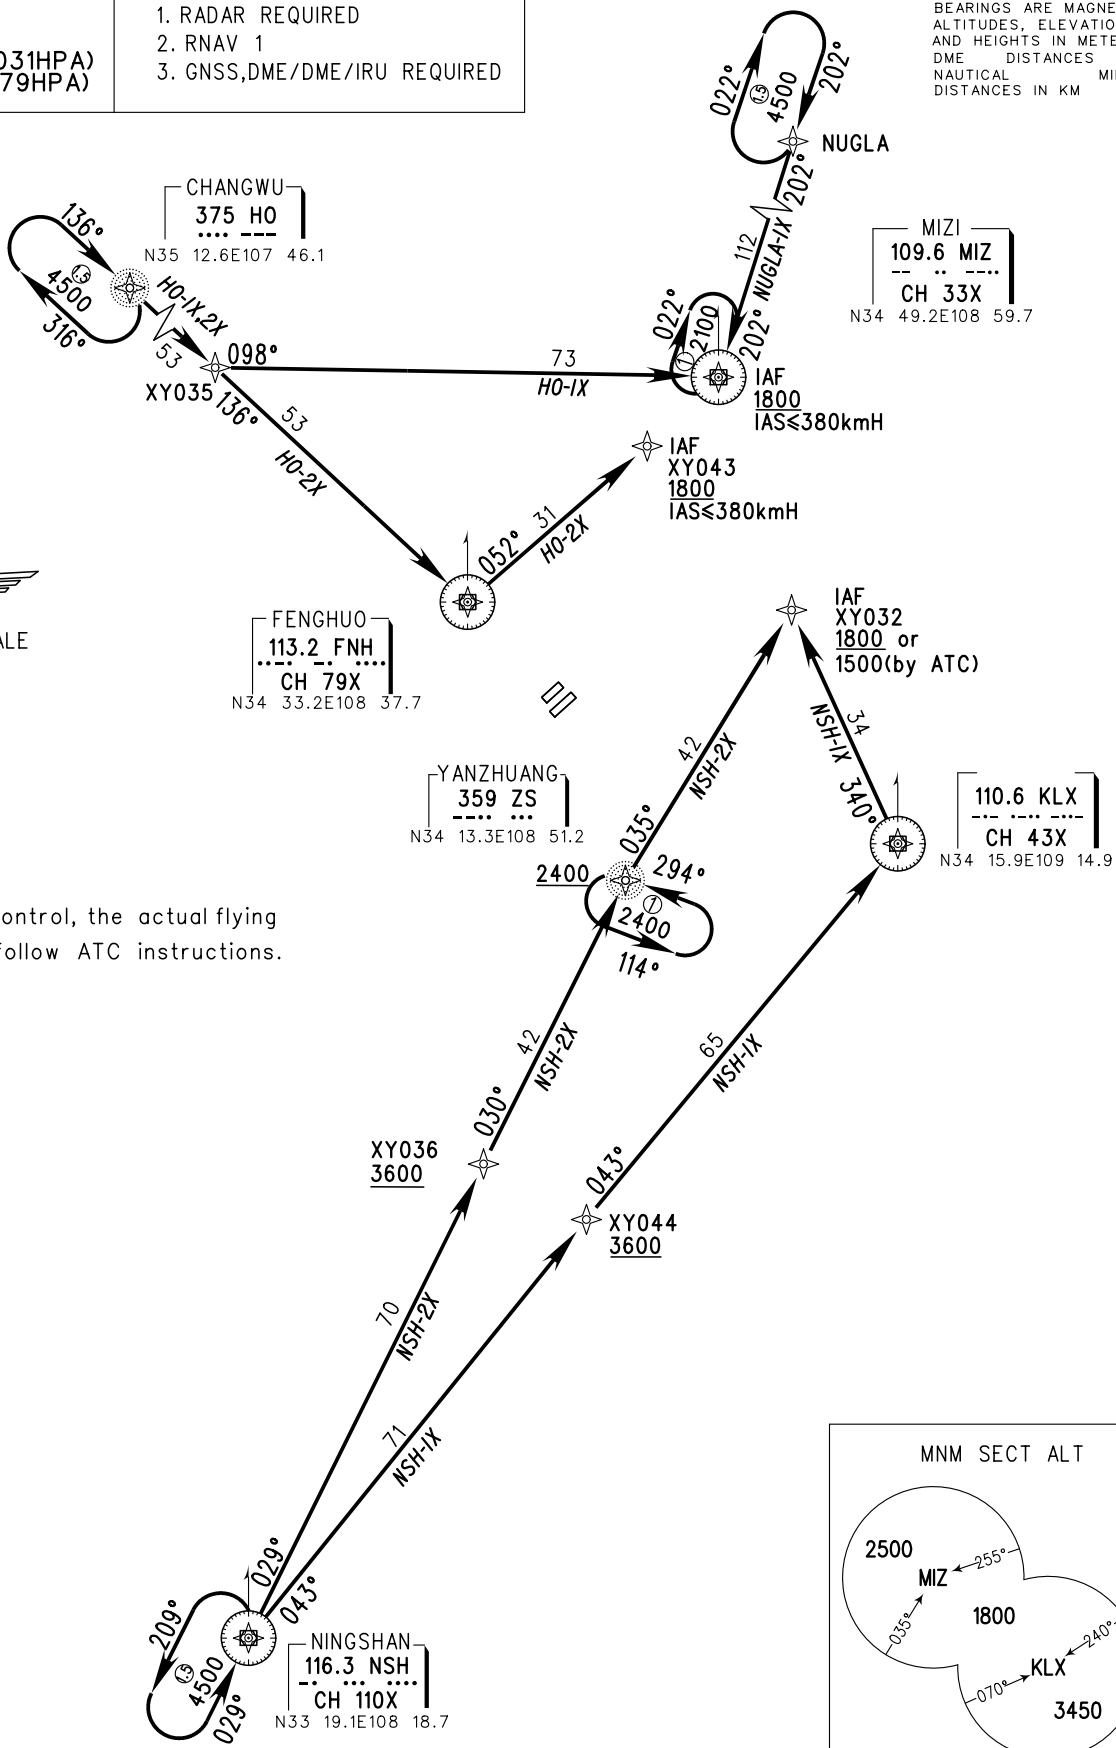

**Note:**

Under radar control, the actual flying altitude shall follow ATC instructions.

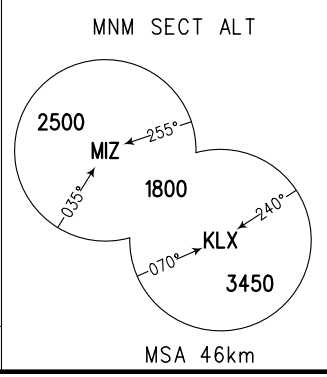

Changes: