

AERODROME CHART


ATIS 128.4
TWR 118.65(130.0)
GND 121.7(130.0)

ZSCN NANCHANG/Changbei
N28° 51.8'E115° 54.0' ELEV 43.7m



RWY	Direction	Bearing strength(PCN)
03	026°	TWY A2, A5: 83/F/B/W/T Stands Nr.210, 211, 501-511, Apron Nr.3, TWY A8, A9, B, B3, G, H, T5: 82/R/B/W/T
		Stands Nr.201-209, 212-220, TWY G2, G3, T4: 74/R/B/W/T RWY, TWY A, A1, A3, A7, B1, B2, G1, Apron Nr.1: 70/R/B/W/T TWY A4, A6, Maintenance apron: 55/R/B/W/T
21	206°	

ILS/LLZ 111.7 IEE

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

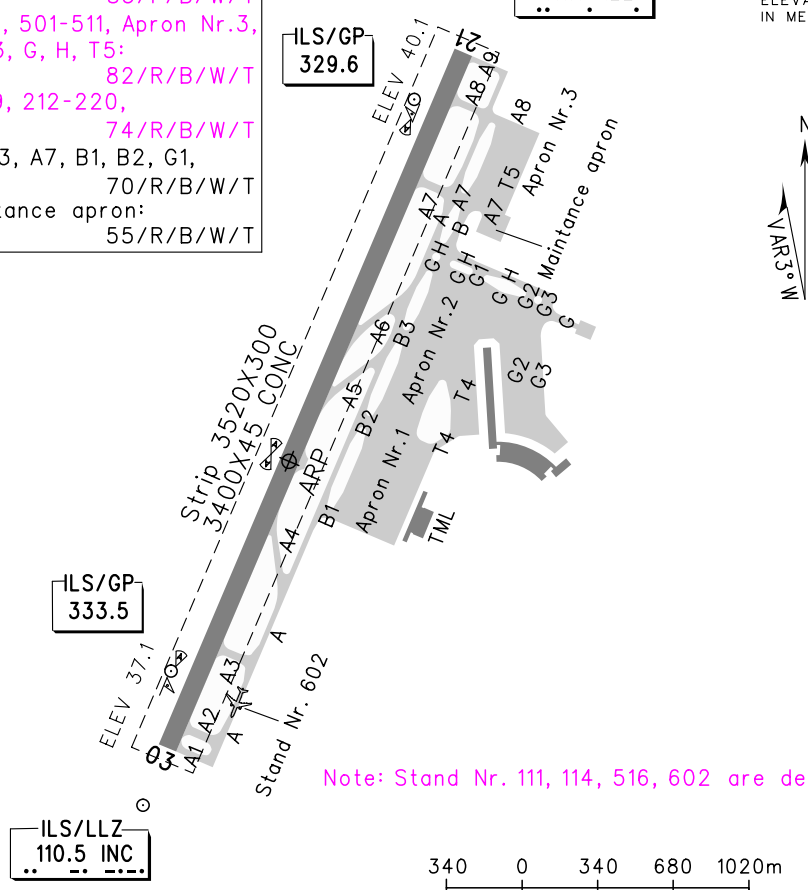

Note: Stand Nr. 111, 114, 516, 602 are de-icing stands.

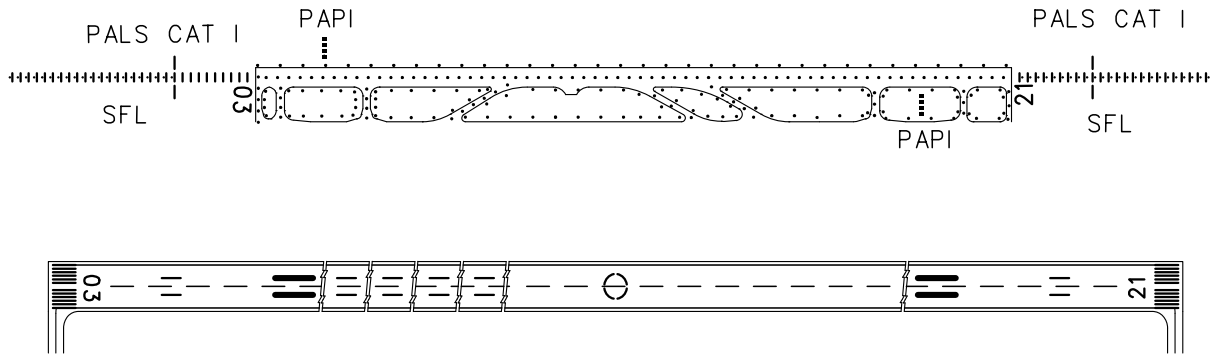

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY03	RWY21
03/ 21	2 TURB ENG or 3&4 ENG	RVR400 VIS800	RVR500 VIS800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	Other	VIS1600			

Changes: PCN, de-icing stands.