


ATIS 127.85		TWR 118.8(118.325) TWR 01 (17L/35R)	
D-ATIS 131.45		118.4(118.725) TWR 02 (16/34)	
		124.35(118.325) TWR 03 (17R/35L)	
APP (ZSSS)	120.3(119.75) AP01	126.65(128.05) AP05	
	125.4(119.75) AP02	126.3(120.65) AP06	
	125.85(119.20) AP03	121.1(124.05) AP07	
	123.8(119.20) AP04	127.75(124.05) AP08	


INSTRUMENT APPROACH CHART-ICAO

ZSPD SHANGHAI/Pudong
RNAV CAT-II ILS RWY35R

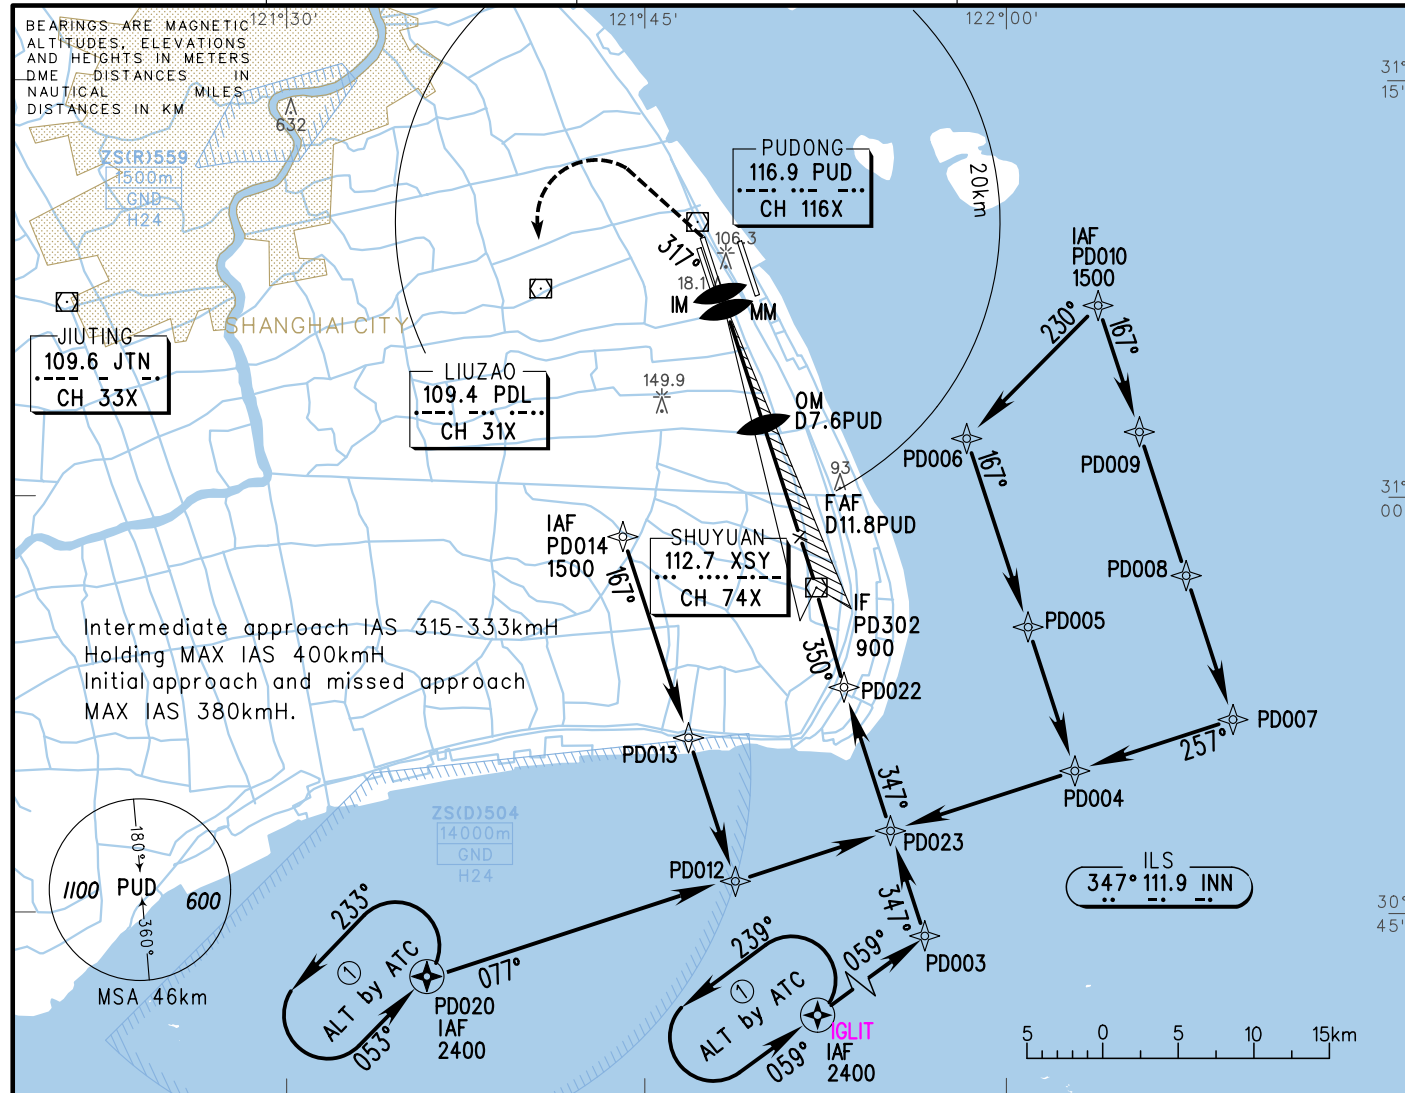

DME (PUD) (NM)	3	4	5	6	7	8	9	10	11
ALT (m)	42	139	236	333	430	527	624	721	818

Climb straight ahead to 140, turn
LEFT on track 317° to 300, then
turn LEFT to PDL at 900, or by ATC.

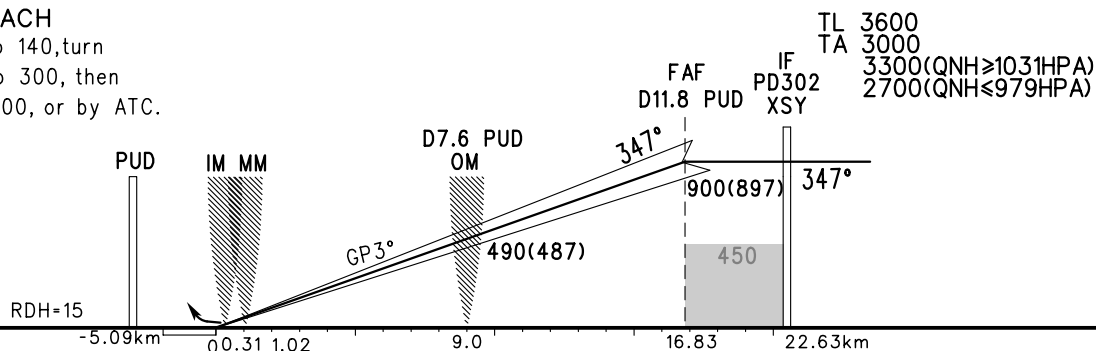

	A	B	C	D	FAF-THR 16.83km							
Radio altimeter RH	31				GS in kt kmH	80 150	20 185	100 220	120 260	140 295	160 335	
Decision altitude DA(DH)	33(30)				Time min:sec	6:49	5:27	4:33	3:54	3:24	3:02	
Autopilot to DA and below	RVR350				Rate of descent m/s	2.2	2.7	3.2	3.8	4.3	4.9	
Manual operation below DA	RVR400				Changes: ATRIP renamed as IGLIT,TWR FREQ.							