


INSTRUMENT APPROACH CHART-ICAO


VAR2°W THR RWY20R ELEV 495 TWR 123.0(118.85) for RWY02L/20R

D-ATIS 131.45
 ATIS 128.6
 APP 124.85(127.7) / AP01
 119.7(127.7) / AP02
 119.25(127.7) / AP03

ZUUU CHENGDU/Shuangliu
 ILS/DME RWY20R

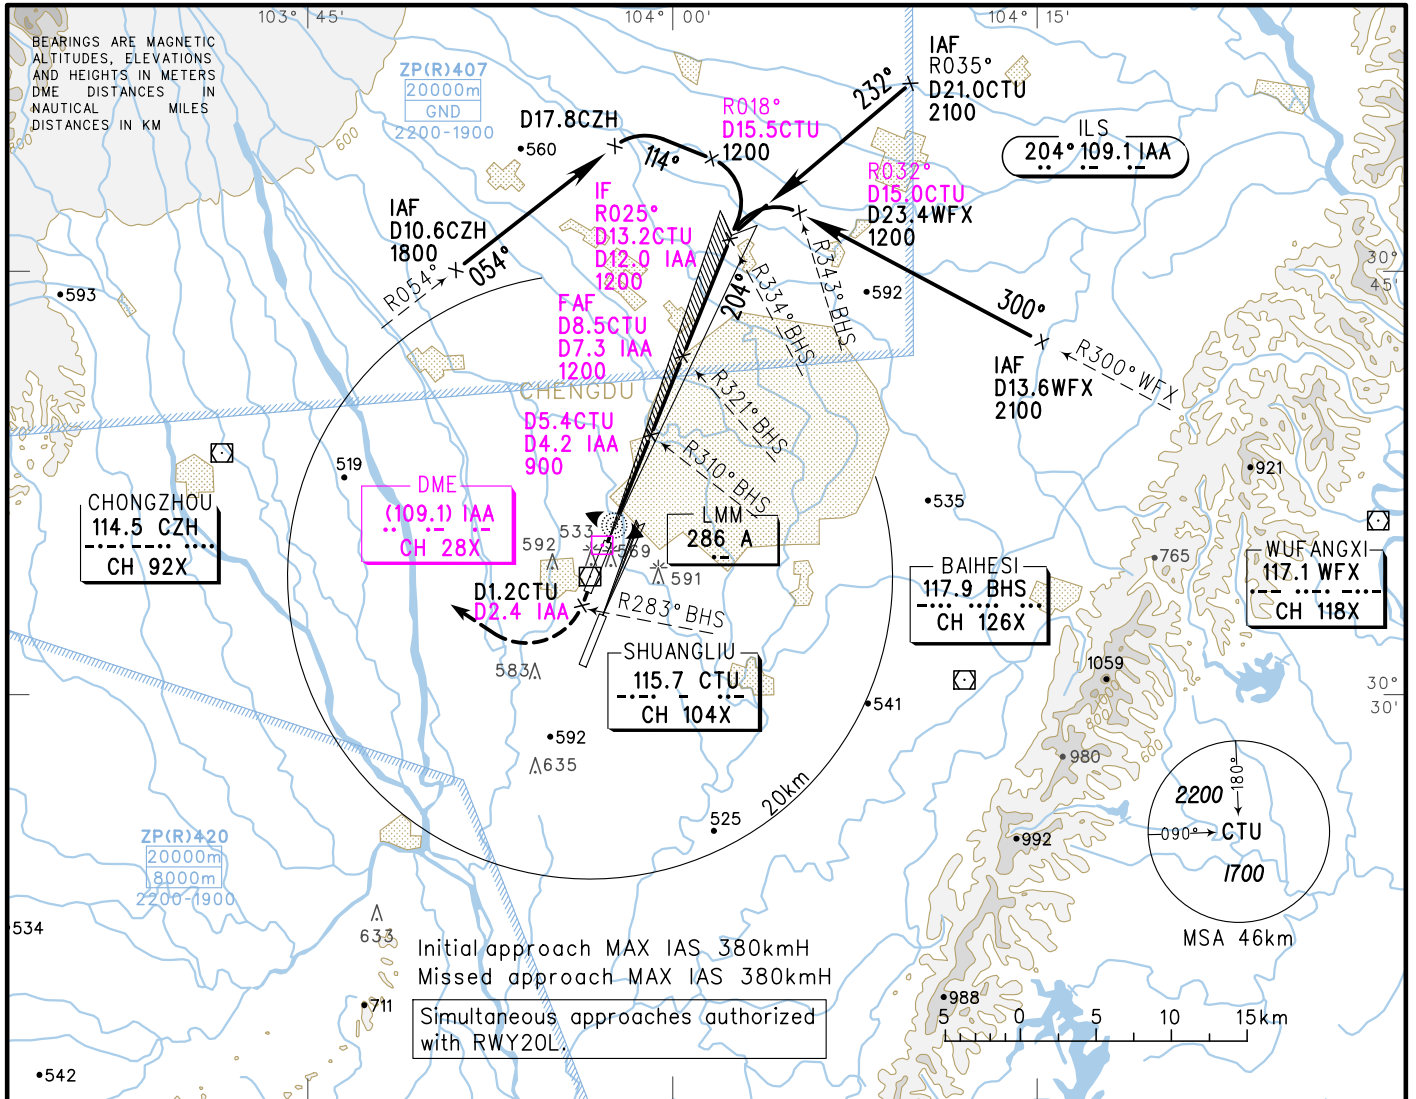

GP INOP	DME (CTU) (NM)	3	4	5	6	7	8		
	ALT (m)	665	762	859	956	1053	1150		

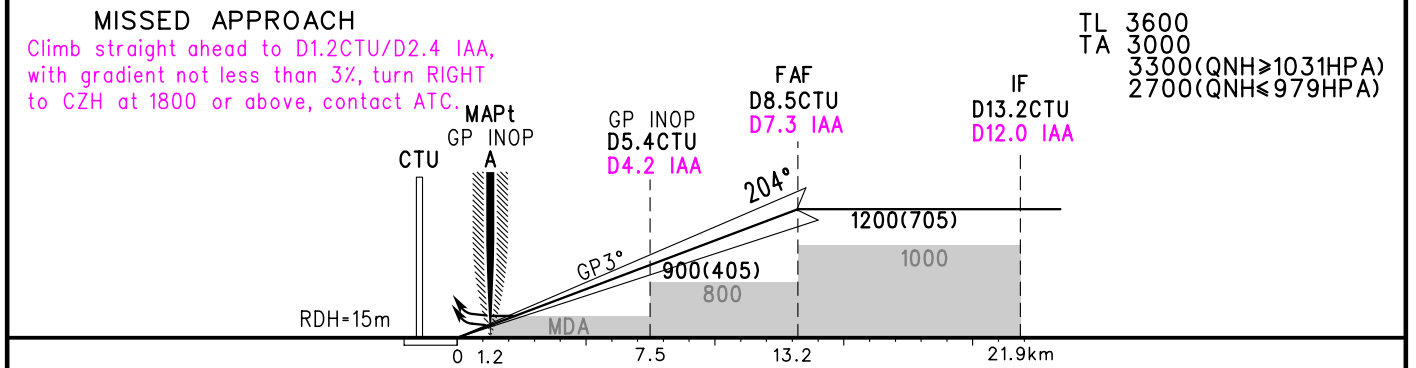

		FAF-MAPt(GP INOP) 12.0km					
		A	B	C	D		
ILS/DME	DA(H) RVR/VIS	555(60) 550/800	560(65) 550/800	565(70) 550/800			
GP INOP	MDA(H) VIS	625(130) 1600					
CIRCLING	MDA(H) VIS	690(178) 2400	720(208) 2800	720(208) 3600			
					GS in kt	80 150	100 185
					Time min:sec	4:48	3:54
					Rate of descent m/s	2.2	2.7
						120 220	140 260
						160 295	180 335
						2:46	2:26
						2:09	2:09

Changes: DME/IAA establish, conversion table, frequency.