INSTRUMENT APPROACH CHART - ICAO

APPROACH	Sector 000°-180° 0400-2000	119.300
	Sector 180°-360° 0400-2000	125.200
	Sector 000°-360° 2000-0400	119.300
KRUG		120.300
TOWER 2		118.100

SANKT-PETERBURG, RUSSIA
PULKOVO
ILS RWY 28R

TRANSITION LEVEL: ❶
TRANSITION HEIGHT: (900)

AD ELEV: 24m
THR ELEV: 20m

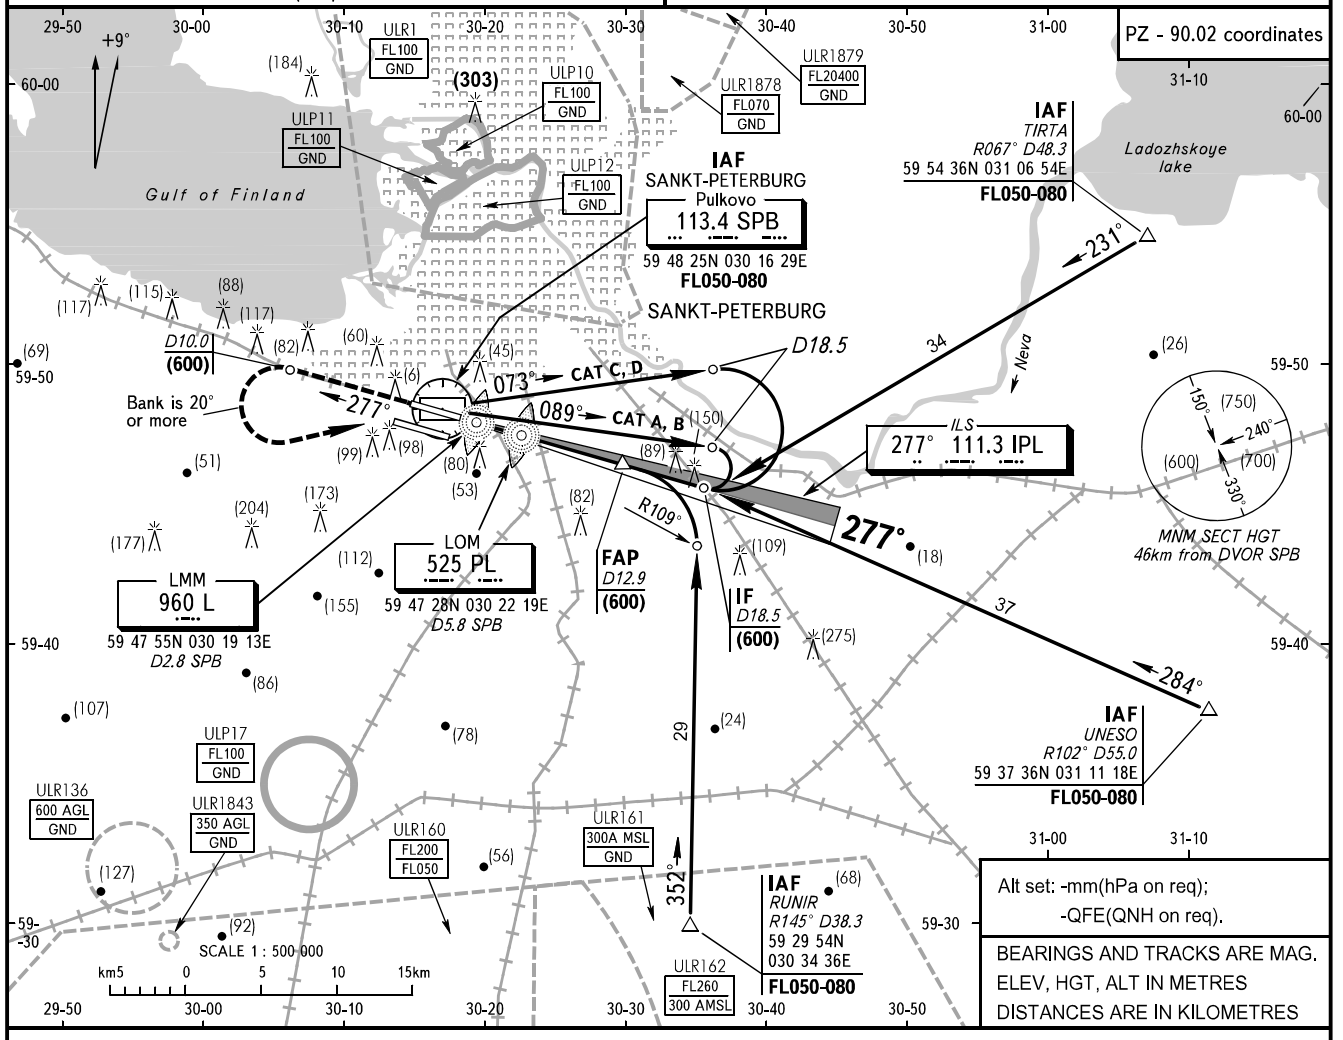

MISSED APPROACH
Climb on track 277° to (600), at D10.0 SPB turn LEFT to DVOR SPB, climbing to (900), then according to chart.

WARNING
During approach interference may appear in the operation of the glide path beacon. Under low visibility conditions the absence of interference shall be guaranteed.

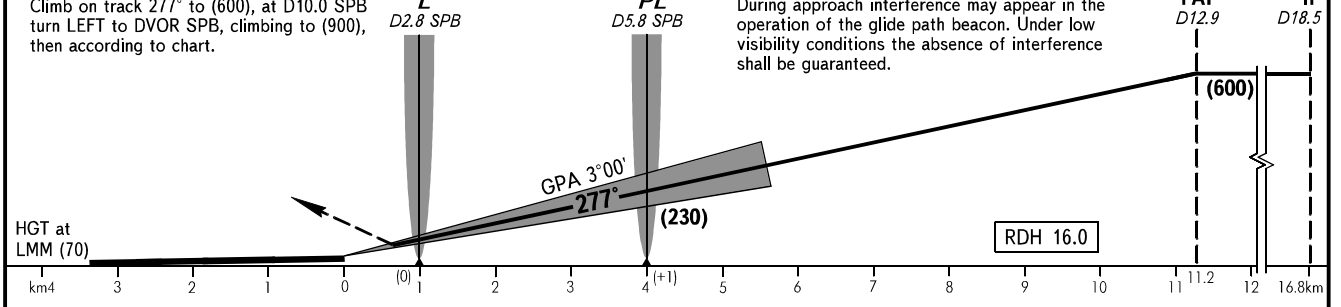

OCA/H		A	B	C	D
Straight-in Approach	CAT IIIA	DA(H) 36(15) RVR 200m			
	CAT II	36(15)	39(18)	43(22)	47(26)
	CAT I	63(42)	66(45)	69(48)	74(53)

❶ TRANSITION LEVEL:
- FL050 when QFE is 733mm mercury column or above;
- FL060 when QFE is less than 733mm mercury column and is 706mm mercury column or above;
- FL070 when QFE is less than 706mm mercury column.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390	420	450
RATE OF DESCENT	m/s	2.2	2.6	3.1	3.5	3.9	4.4	4.8	5.2	5.7	6.1	6.6

CHANGE: New chart