


**INSTRUMENT APPROACH CHART - ICAO**

VAR 2° E

ELEV 470  
OCH RELATED TO  
THR 26L ELEV 470

LEIPZIG ATIS	123.950	LEIPZIG TOWER (S)	121.100
MÜNCHEN RADAR	126.175	LEIPZIG GROUND	121.675
LEIPZIG DIRECTOR	128.475	LEIPZIG DELIVERY	121.800
LEIPZIG TOWER (N)	125.950		


**LEIPZIG/HALLE  
RNAV (GPS)  
RWY 26L**

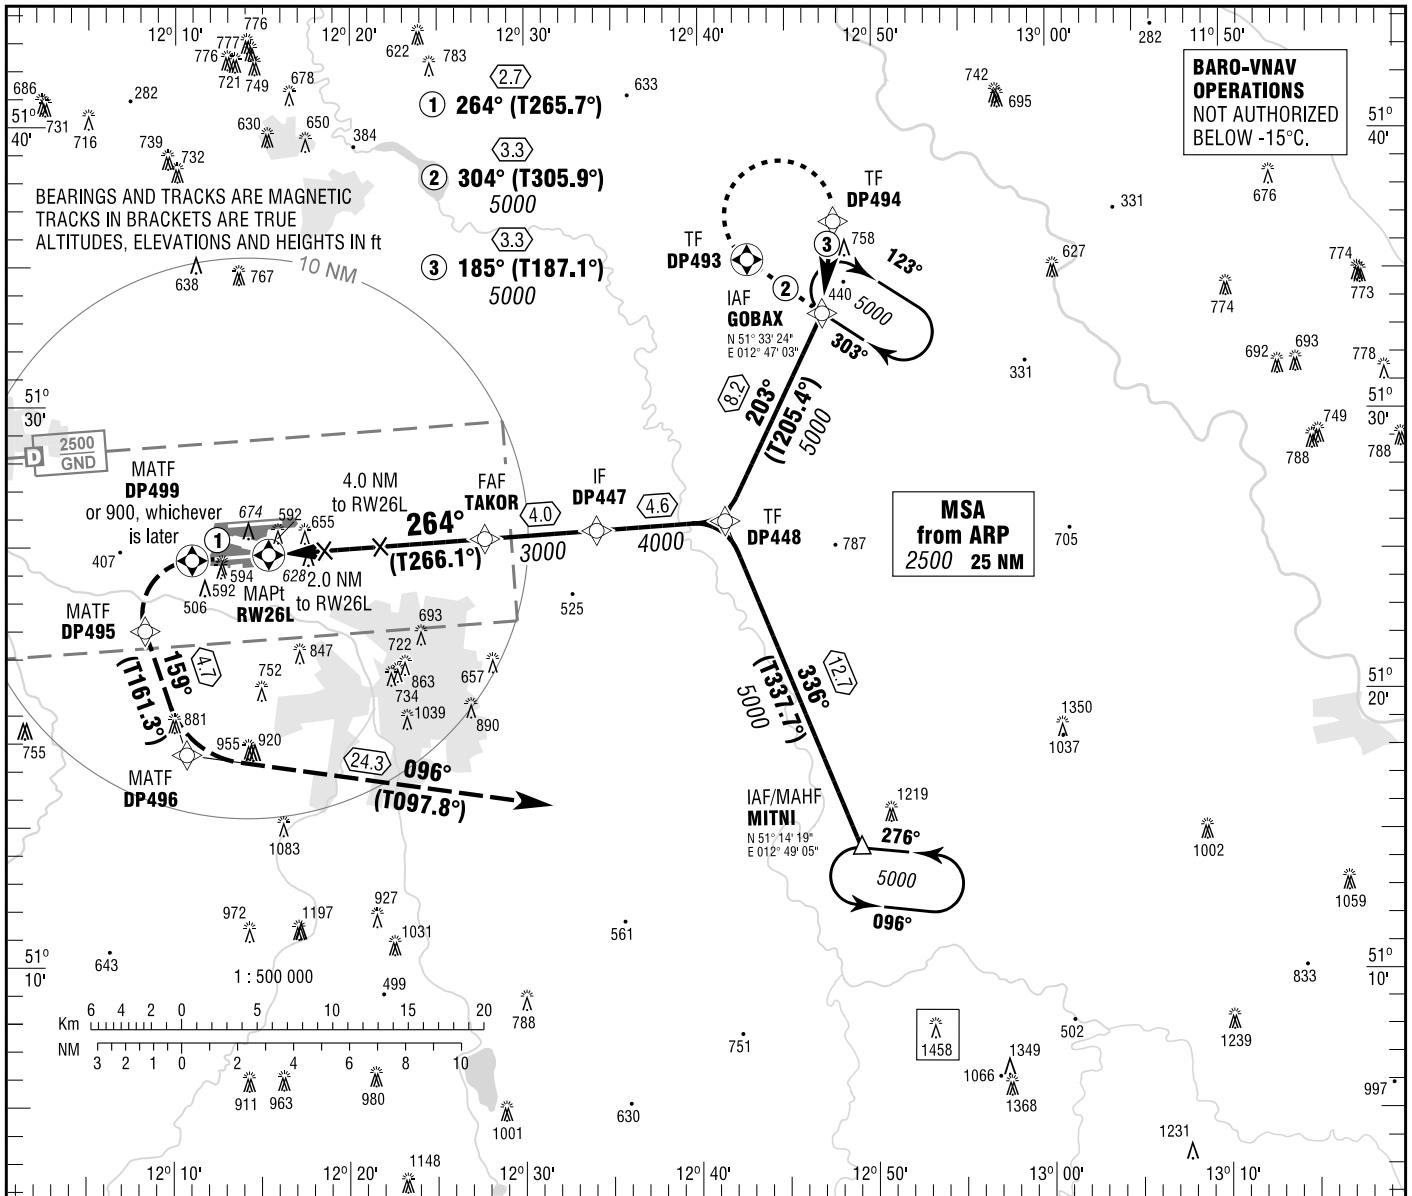

**BARO-VNAV OPERATIONS NOT AUTHORIZED BELOW -15°C.**

**MISSED APPROACH PROCEDURE RNAV (GPS)**

On track 264° to DP499 or 900, whichever is later; LT, via DP495 on track 159° to DP496; LT, on track 096° to MITNI, climbing to 5000.  
DP499 - [A900+; L] - DP495 - DP496[L] - MITNI [A5000]

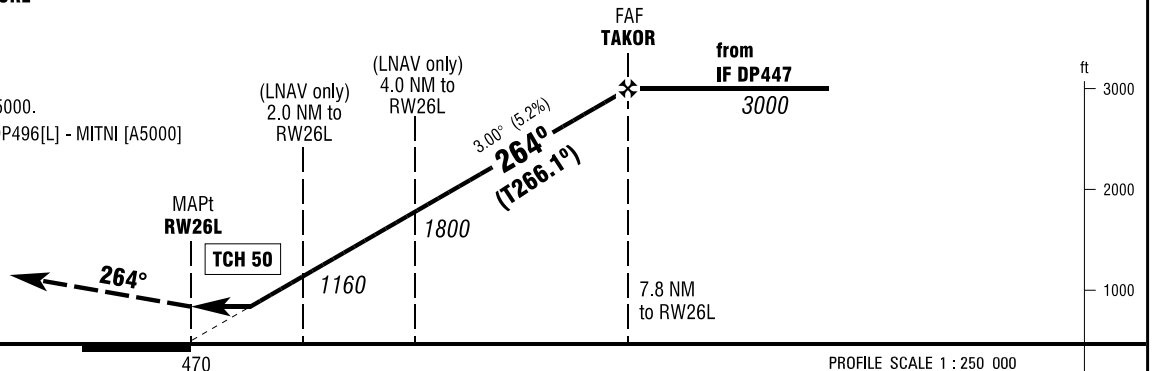

OCA (OCH)	A	B	C	D
LNAV	920 (440)	920 (440)	920 (440)	920 (440)
LNAV / VNAV	870 (400)	870 (400)	870 (400)	870 (400)

DIST THR / RW26L	1	2	3	4	5	6	7
ALTITUDE	840	1160	1480	1800	2120	2440	2750

Timing not authorized for defining the MAPt.

GS	kt	80	100	120	140	160	180
TAKOR - RW26L (7.8 NM)	MIN:SEC	5:51	4:41	3:54	3:21	2:56	2:36
Rate of descent (5.2%)	ft / MIN	420	530	640	740	850	960

Correction: NON-RNAV missed approach withdrawn.