


LEIPZIG/HALLE
RNAV (GPS)
RWY 26R

LEIPZIG ATIS 123.950 LEIPZIG TOWER (S) 121.100
MÜNCHEN RADAR 126.175 LEIPZIG GROUND 121.675
LEIPZIG DIRECTOR 128.475 LEIPZIG DELIVERY 121.800
LEIPZIG TOWER (N) 125.950


ELEV 470
OCH RELATED TO VAR 2° E
THR 26R ELEV 448

INSTRUMENT
APPROACH
CHART - ICAO

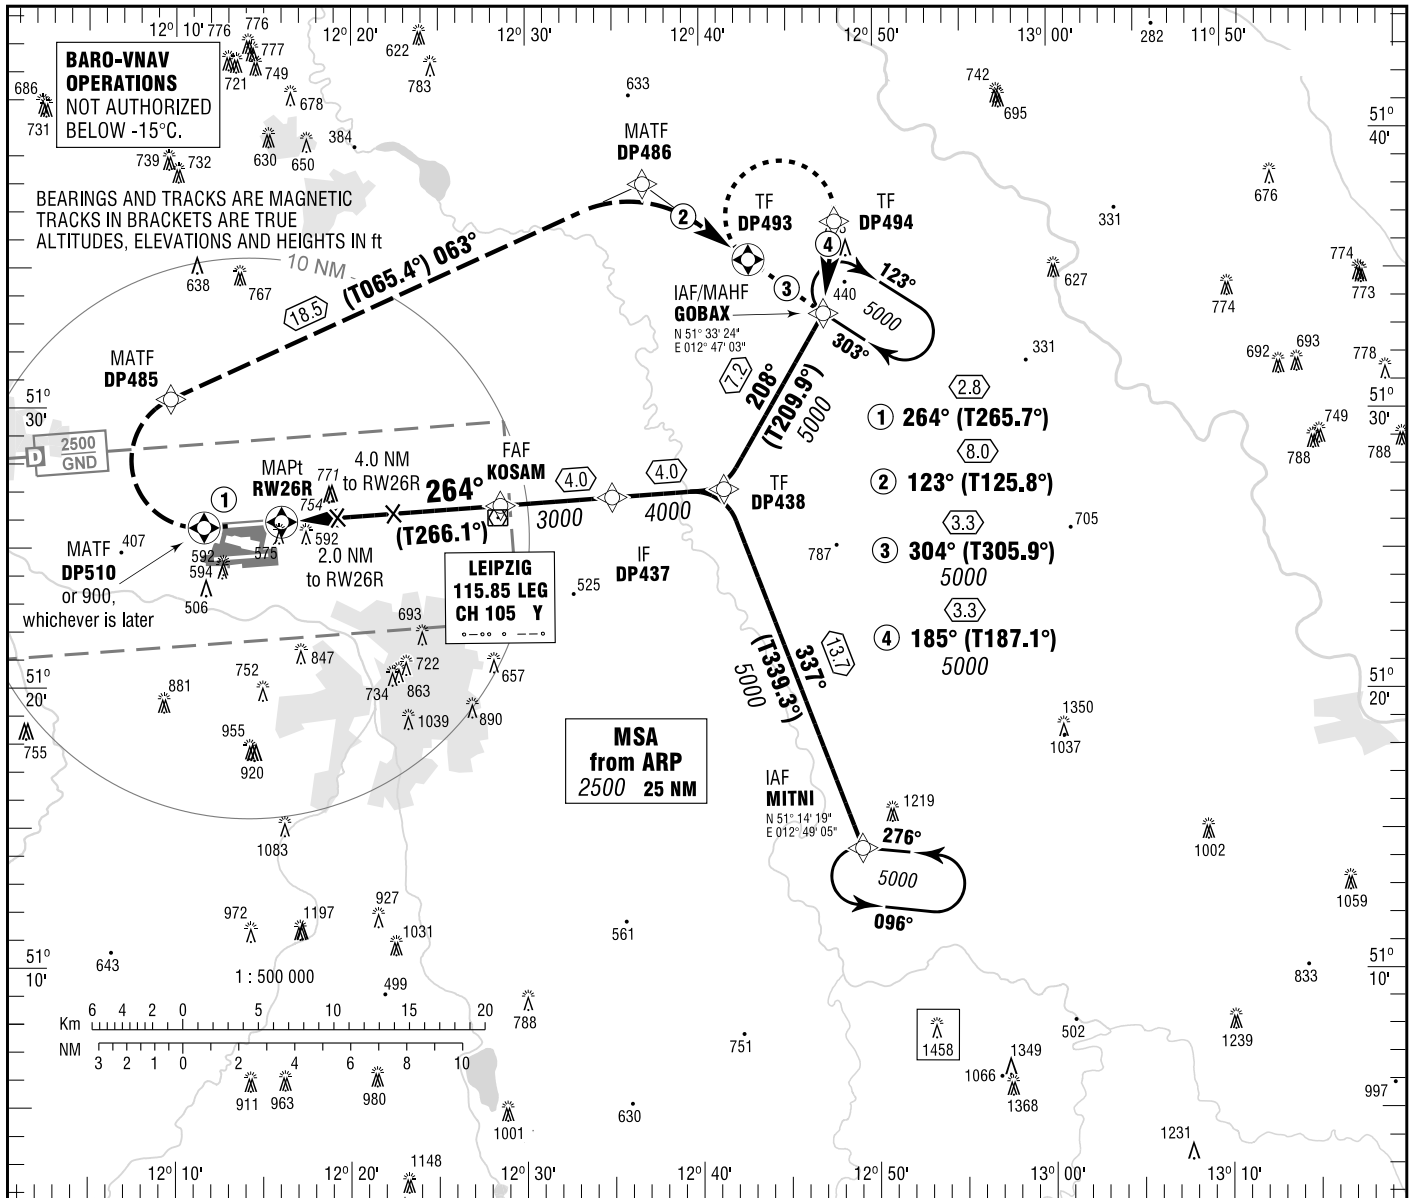

MISSED APPROACH PROCEDURE
RNAV (GPS)

On track 264° to DP510 or 900, whichever is later; RT, via DP485 on track 063° to DP486;
RT, on track 123° to GOBAX, climbing to 5000.
DP510 - [A900+; R] - DP485 - DP486[R] - GOBAX[A5000]

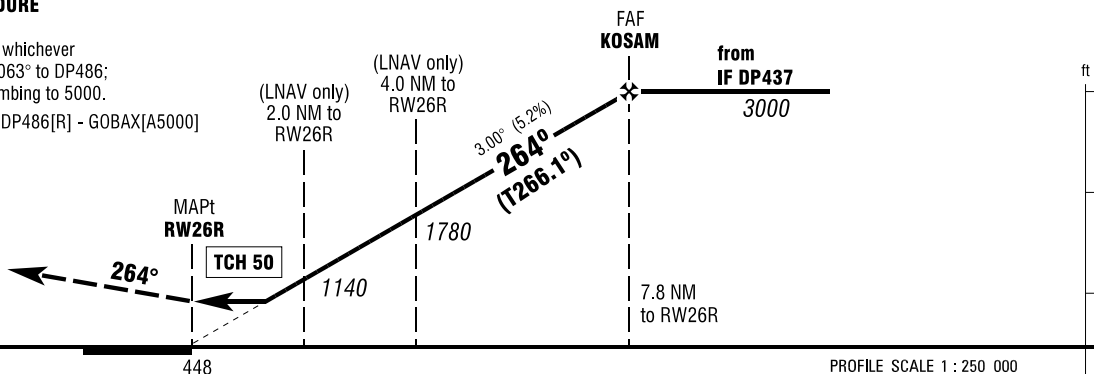

OCA (OCH)	A	B	C	D
LNAV	950 (510)	950 (510)	950 (510)	950 (510)
LNAV / VNAV	950 (500)	950 (500)	950 (500)	950 (500)

DIST THR / RW26R	2	3	4	5	6	7		
ALTITUDE	1140	1460	1780	2090	2410	2730		

Timing not authorized for defining the MAPt.

GS	kt	80	100	120	140	160	180
KOSAM - RW26R (7.8 NM)	MIN:SEC	5:51	4:41	3:54	3:21	2:56	2:36
Rate of descent (5.2%)	ft / MIN	420	530	640	740	850	960

Correction: NON-RNAV missed approach withdrawn.