


FRANKFURT-HAHN  
ILS CAT II or LOC  
RWY 21

HAHN ATIS	136.350
LANGEN RADAR	125.600
HAHN TOWER	119.650
HAHN GROUND	121.975


ELEV 1649  
OCH RELATED TO VAR 1° E  
THR 21 ELEV 1595

INSTRUMENT  
APPROACH  
CHART - ICAO

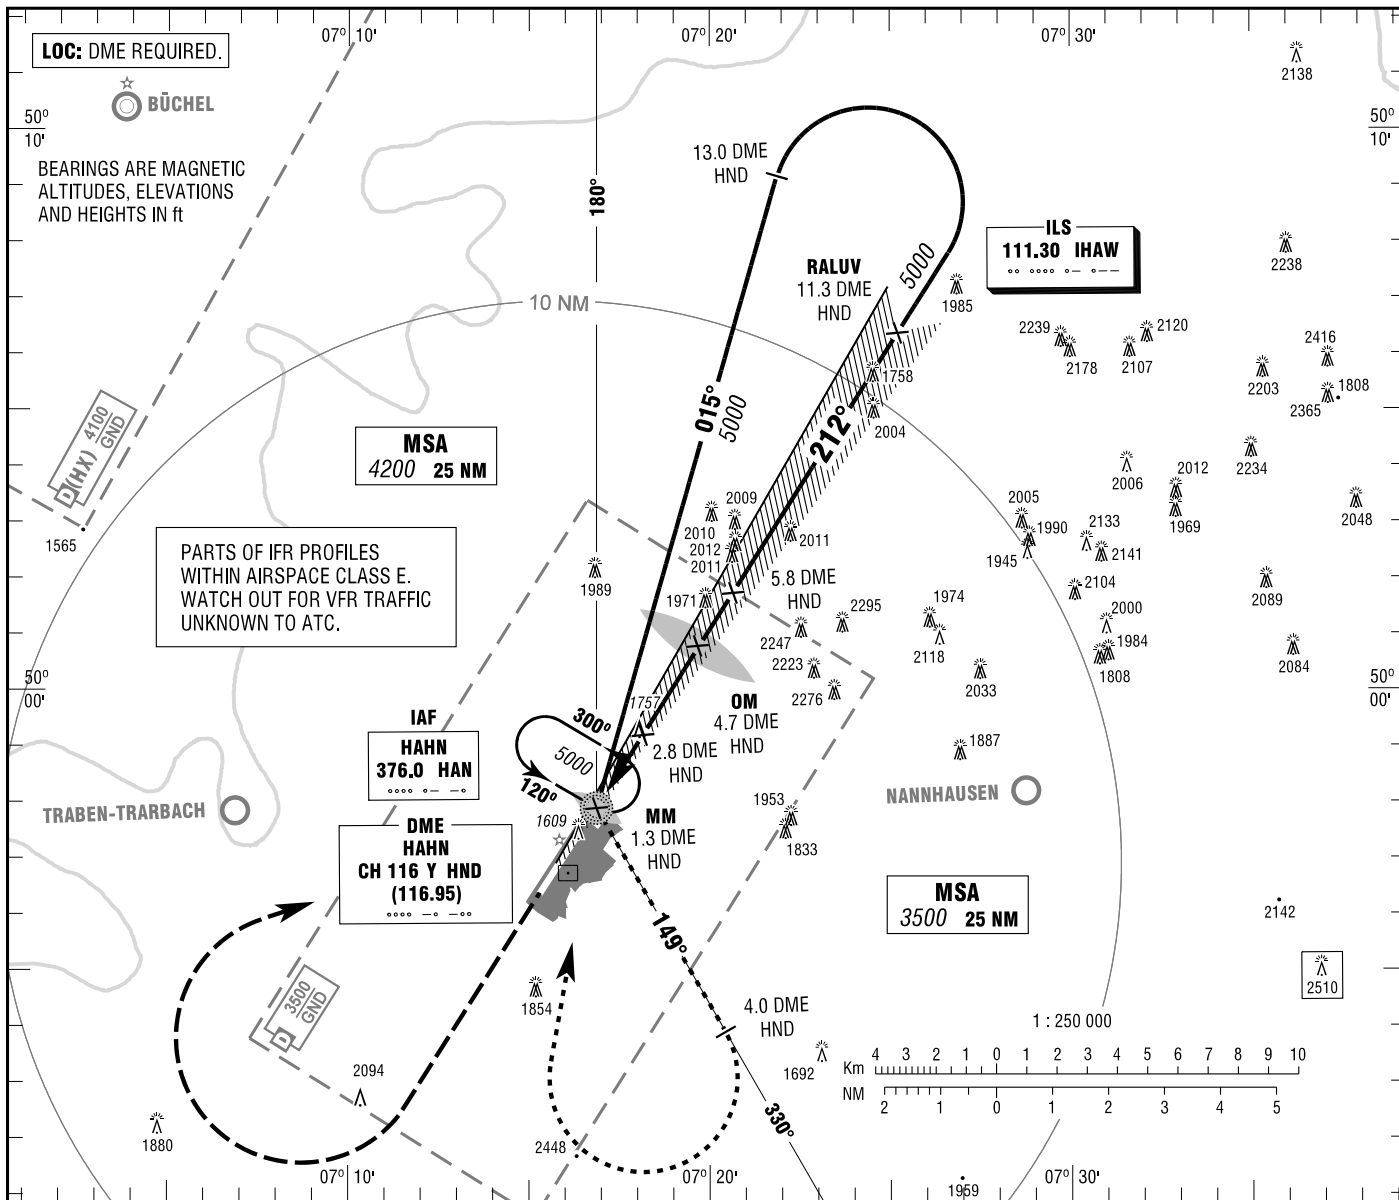

**MISSED APPROACH PROCEDURE**

Climb straight ahead to 5000,  
RT to HAN NDB.

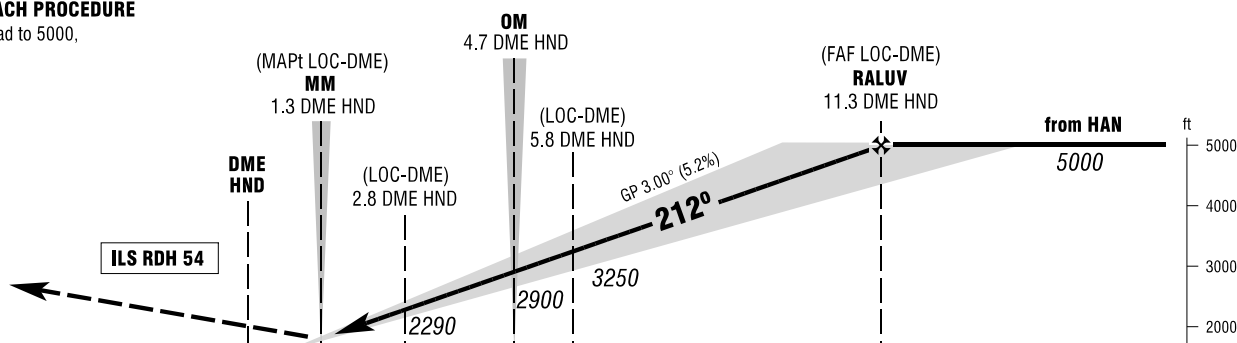

NM 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 NM

PROFILE SCALE 1 : 250 000

OCA (OCH)	A	B	C	D	D <sub>L</sub>
ILS CAT I	1740 (145)	1750 (155)	1760 (165)	1770 (175)	
ILS CAT II	1651 (56)	1668 (73)	1681 (86)	1694 (99)	
LOC-DME	2010 (410)	2010 (410)	2010 (410)	2010 (410)	

DME HND	2	3	4	5	6	7	8	9	10	11
DIST THR	1.2	2.2	3.2	4.2	5.2	6.2	7.2	8.2	9.2	10.2
ALTITUDE	2040	2350	2670	2990	3310	3630	3950	4260	4580	4900

**LOC-DME:** Timing not authorized for defining the MAPt.

GS	kt	80	100	120	140	160	180
OM - THR (3.9 NM)	MIN:SEC	2:56	2:20	1:57	1:40	1:28	1:18
Rate of descent (5.2%)	ft / MIN	420	530	640	740	850	960

CAT IIIa APPROVED. MNM DH 50ft, MNM RVR 200m

Correction: Obstacles revised, note added.