
AERODROME GROUND MOVEMENT AND AIRCRAFT PARKING CHART - ICAO **TOWER** 118.100 **GROUND** 118.800 ULAN-UDE, RUSSIA

MUKHINO

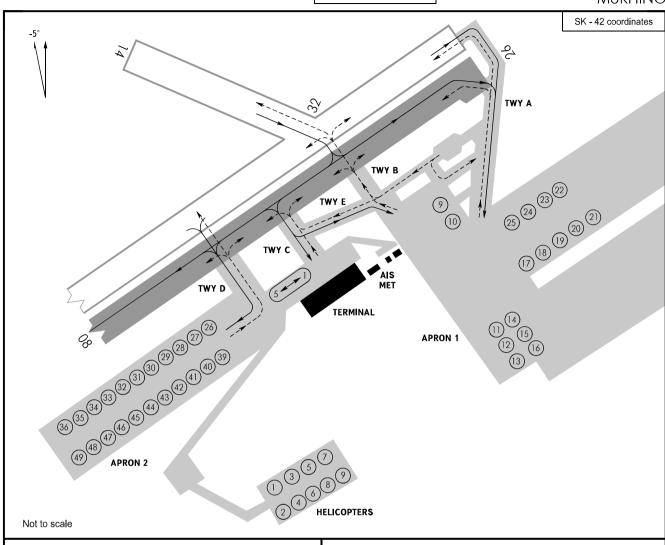

APRONS:

Apron 1: Surface - Concrete Strength - PCN 40/R/A/X/T

Apron 2: Surface - Concrete Strength - PCN 34/R/A/X/T

TAXIWAYS:

A, B, C, D, E A, B, D, E C Width: - 23m

Surface: - Asphalt

- Concrete - PCN 27/F/A/Y/T Strength:

A, B, D, E - PCN 53/R/B/W/T

WARNING:

- 1. Index 6 ACFT taxiing along TWY A shall be carried out under inner engines power only and when DIST BTN outside edges of main gear wheels is up to 12.5m.

 2. Index 6 ACFT taxiing along TWY B shall be carried out under
- inner engines power only and when DIST BTN outside edges of main gear wheels is up to 9.5m.
- 3. Taxiing into, parking onto stands 1-5 shall be carried out under own engines power. Taxiing out of stands 1, 2, 3 shall be carried out by towing only. Taxiing out of stands 4, 5 shall be carried out under own engines power.

ACFT types:	STANDS:
II-96-400, An-124-100	5
II-76T, II-76TD, An-12 Tu-204 and its modifications, B757-200	4, 5, 9, 10 1, 4, 5
Tu-134, Yak-42, Tu-154 and its modifications,	1 - 5
II-114 and its modifications, An-140 and its modifications, ATR-72, ATR-42 and their modifications,	
A-319, A-320 and their modifications,	
B737, B767 and their modifications, SAAB-340, CRJ-100/200 and their modifications	
Yak-40	4, 5, 11-15
An-30, An-32, An-72, An-74 An-24, An-26	4, 5, 11-16 11-16
Mi-8 HEL and its modifications	4, 5, 9, 10

STAND NR	LATITUDE	LONGITUDE	
9, 10	51 48.3N	107 27.0E	١